


underslung Block & Brick Arms, with mechano-hydraulic equilibration

### Technical Data

Model	G <sup>2)</sup> mm	D <sup>1)</sup> mm	Reduction of opening range per side E mm	Weight kg	Price per pair 人民币
<b>2T102UH</b>	1.265	-	90	170	On request

1) \*Height D depends on coating / buffers: HG = Rubber coating Ø 75 mm, HV = Polyurethane coating Ø 75 mm, HV-Q = Square Polyure

2) Length G depends on the number of pistons ( ): available arm length 937 (11), 1.019 (12), 1.101 (13), 1.183 (14), 1.265 (15)

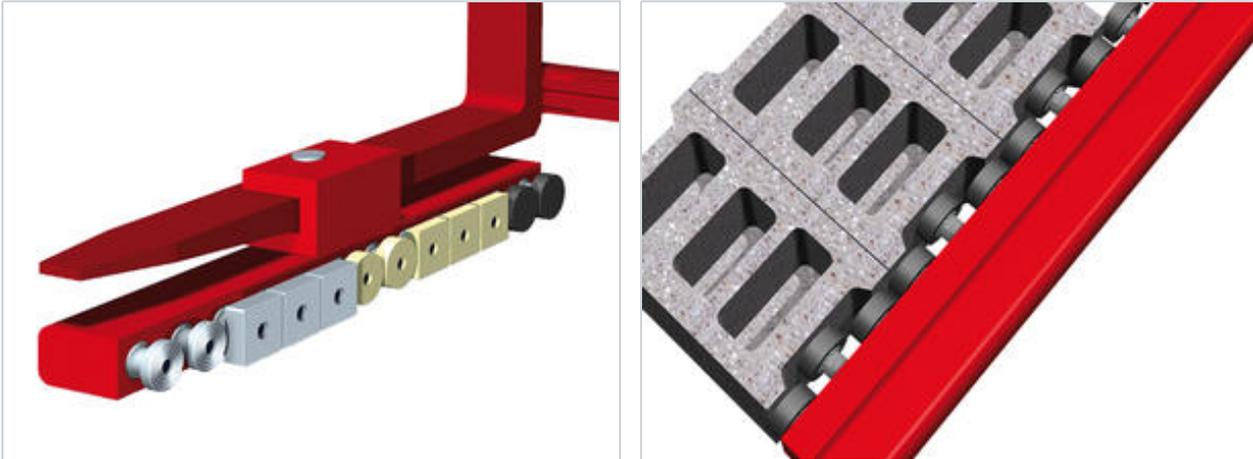

### Specification:

KAUP underslung Block & Brick Arms

T102UH are designed with mechano-hydraulic equilibration with different coatings which compensate irregular contours so that the load can be clamped optimally.

### Qualities:

- Simple assembly
- Solid construction
- Complete range of different buffers for compensation