Reach Fork T140SV (23.11.2026)

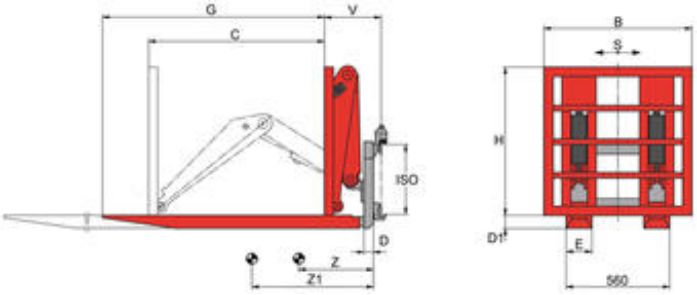

with independent sideshift - 2 hydraulic functions

Model	Cap. extended kg	Cap. retracted kg	LCD mm	S mm	B mm	C mm	D mm	D1 mm	E mm	G mm	H mm	ISO	V mm	CofG Z mm	CofG Z1 mm	Weight kg	Price 人民币
2T140SV	**2.000**	**2.500**	**600**	**±100**	**800**	**950**	**70**	**50**	**140**	**1.200**	**800**	**2**	**310**	**373**	**685**	**430**	**On request**
2T140SV	**2.000**	**2.500**	**600**	**±100**	**800**	**950**	**70**	**50**	**140**	**1.200**	**800**	**3**	**310**	**332**	**607**	**490**	**On request**

Max. distance from fork tip to mast = G + V + C + thickness of FLT carriage.
Also available without sideshift, model T140
Without sideshift the lost load center is reduced by approx. 30 mm

Reach Fork T140SV



Specification:

KAUP Reach Forks T140SV combine the

advantages of reach trucks - narrow working aisles with the lost load

centre close to the front chassis - with those of the counterbalance

forklift truck. The mobile fork on the backrest - the Reach Fork -

inserts under the pallet. At the same time the fixed bearing forks

support the loading process. By retracting the Reach Forks and backrest

the load is moved to the bearing area of the forklift truck. It can then

be picked up and transported.

Qualities:

- Very good residual capacity
- Good visibility conditions
- Solid design
- Sideshift serially