


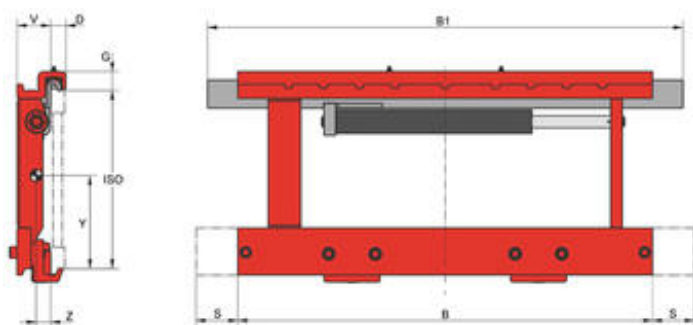

Sideshifter for container stuffing applications - 1 hydraulic function

Technical Data

Model	Cap. kg	LCD mm	B mm	B1 mm	S mm ¹⁾	D mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
2T151P4N-C	2.500	500	780	800	±160	33	33	2	55	21	55	On request

2T151P-C	2.500	500	780	1.020	±225	33	40	2	72	34	57	On request
2T151P-C	2.500	500	1.060	1.020	±225	33	40	2	72	35	68	On request
2T151P-C	2.500	500	1.150	1.020	±225	33	40	2	72	35	73	On request

4T151P-C	5.000	500	780	1.100	±250	40	49	3	82	36	90	On request
4T151P-C	5.000	500	1.200	1.100	±250	40	49	3	82	38	117	On request
4T151P-C	5.000	500	1.600	1.100	±250	40	49	3	82	40	143	On request

6T151P-C	8.000	600	1.800	1.100	±250	50	66	4	107	55	301	On request
----------	-------	-----	-------	-------	------	----	----	---	-----	----	-----	------------

1) Differing shift strokes available upon request.

Higher capacities and other construction widths available upon request.

Load Backrest see model T179.

2T151P4N-C with EASYSLIDE greasable sliding pads

Bottom brackets with roller guidance (SMOOTHROLL).

Optional in explosion proof version



Sideshifter with increased sideshift stroke T151P-C



Specification:

The KAUP Container Sideshifter T151P-C

simplifies loading and unloading of containers. This attachment with increased sideshift stroke makes it possible to reach beyond the chassis width of the forklift truck and place loads close to the container wall.

Qualities:

- Optimal utilisation for container loading
- Ideal for confined spaces