


with independent sideshift - without forks - for forks acc. to ISO 2330 - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	PA mm	suitable for fork width mm	ISO	V mm	CofG Z mm	CofG <sub>v</sub> Y mm	Weight kg	Price 人民币
2T156B	2.500	500	±100	290-795	890	28	590	70-125	2	55	23	217	60	On request
2T156B	2.500	500	±100	320-825	980	28	590	70-125	2	55	22	217	63	On request
2T156B	2.500	500	±100	310-945	1.040	28	590	70-125	2	55	22	216	66	On request
2T156B	2.500	500	±100	295-1055	1.150	28	590	70-125	2	55	22	215	70	On request

4.5T156	5.000	500	±100	355-1055	1.150	40	600	100-150	3	82	39	265	136	On request
4.5T156	5.000	500	±100	355-1255	1.350	40	600	100-150	3	82	40	265	152	On request

Not suitable for clamping between the forks.  
Forks see model T180.  
The original forks of the forklift truck, up to length of 1600 mm, can be used.  
Load backrest see model T173

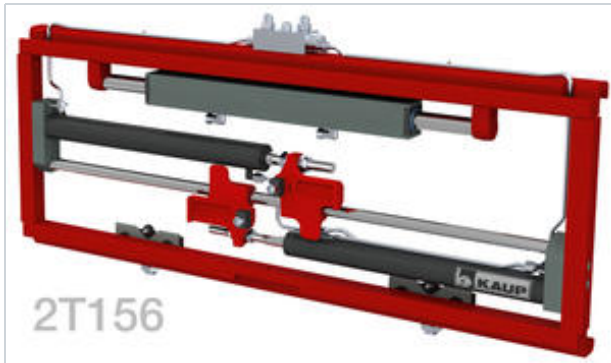

### Specification:

The Sideshifter with Fork Adjustment

T156 is the new starter series of KAUP Fork Positioners. This attachment with excellent price-performance ratio is designed with hydraulic

parallel movement with two cylinders and is based on the P4-Sideshifter.

---

### Qualities:

- Excellent price-performance ratio
- For light duty operation
- Hydraulic parallel movement
- Independent sideshift
- Original forklift trucks useable
- Optional: without sideshift