

with independent sideshift - without forks - for forks acc. to ISO 2330 - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	S mm	A mm	D mm	suitable for fork width mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
2T163SN	2.500	600	±100	350-820	830	70-120	2	82	38	91	On request
2T163SN	2.500	600	±100	350-820	830	125-140	2	82	38	92	On request
2T163SN	2.500	600	±100	310-1.030	1.040	70-120	2	82	40	104	On request
2T163SN	2.500	600	±100	350-1.030	1.040	125-140	2	82	40	104	On request
2T163SN	2.500	600	±100	430-1.150	1.160	70-120	2	82	41	109	On request
2T163SN	2.500	600	±100	390-1.350	1.360	70-120	2	92	49	134	On request
2T163SN	2.500	600	±100	390-1.490	1.500	70-120	2	92	50	143	On request
2T163SN	2.500	600	±100	390-1.690	1.710	70-120	2	92	49	171	On request
2T163SN	2.500	600	±100	500-2.120	2.130	70-120	2	92	51	209	On request
4T163SN	4.000	500	±100	390-1.030	1.040	90-160	3	82	41	153	On request
4T163SN	4.000	500	±100	430-1.150	1.160	90-160	3	82	42	162	On request
4T163SN	4.000	500	±100	390-1.350	1.360	90-160	3	82	43	177	On request
4T163SN	4.000	500	±100	390-1.490	1.510	90-160	3	92	51	214	On request
4T163SN	4.000	500	±100	390-1.690	1.710	90-160	3	92	52	232	On request
4,5T163SN	5.000	500	±100	430-1.150	1.160	90-160	3	92	48	182	On request
4,5T163SN	5.000	500	±100	390-1.350	1.360	90-160	3	92	50	200	On request
4,5T163SN	5.000	500	±100	390-1.790	1.810	90-160	3	112	65	303	On request
4,5T163SN	5.000	500	±100	450-1.900	1.910	90-160	3	112	65	316	On request
4,8T163SN	5.000	600	±100	430-1.150	1.160	90-160	3	92	45	195	On request
4,8T163SN	5.000	600	±100	390-1.350	1.360	90-160	3	92	50	216	On request
5T163SN	5.000	600	±100	470-1.190	1.200	150-200	4	102	57	256	On request
6T163SN	8.000	600	±160	470-1.390	1.400	150-200	4	102	46	345	On request
6T163SN	8.000	600	±160	470-1.470	1.510	150-200	4	102	50	353	On request
6T163SN	8.000	600	±160	500-1.680	1.690	150-200	4	102	50	385	On request
6T163SN	8.000	600	±160	470-1.870	1.880	150-200	4	112	58	451	On request

Model	Cap. kg	LCD mm	S mm	A mm	D mm	suitable for fork width mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
6T163SN	8.000	600	±160	530-1.980	1.990	150-200	4	112	58	463	On request

8T163SN	8.000	600	±160	500-2.120	2.130	150-200	4	132	68	588	On request
8T163SN	8.000	600	±160	530-2.380	2.400	150-200	4	132	70	642	On request


Not suitable for clamping between the forks.

Forks see model T180.

The original forks of the forklift truck, up to length of 1.600 mm, can be used. If using longer forks the minimum bracket width to be selected is 250 mm (recommended width).

Load backrest see model T173

Also available without sideshift, model T163N

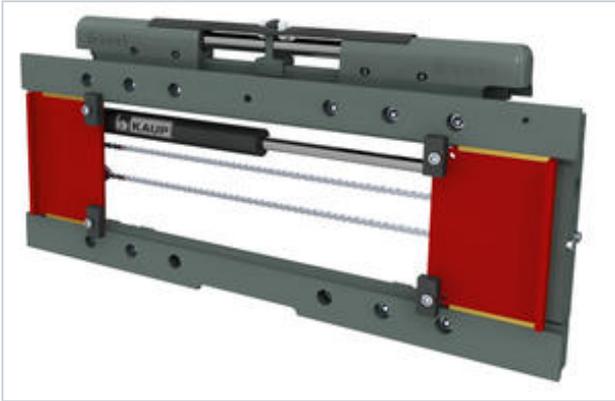

Specification:

Simply designed and therefore extremely economical, the KAUP Fork Positioner T163SN has absolutely symmetrical fork adjustment with synchronism via roller chain. This range is based on the Sideshifter T151-P2 range with corresponding capacities.

Qualities:

- For light duty (indoors e.g. in dirt free conditions)
- Synchronism via roller chain
- Original forklift trucks useable
- Construction width of the attachment and opening range is not dependent on the width of the forklift truck carriage
- With sideshift (T163SN) or without sideshift (T163N)