
Triple Sideshifter T253B (10.11.2026)

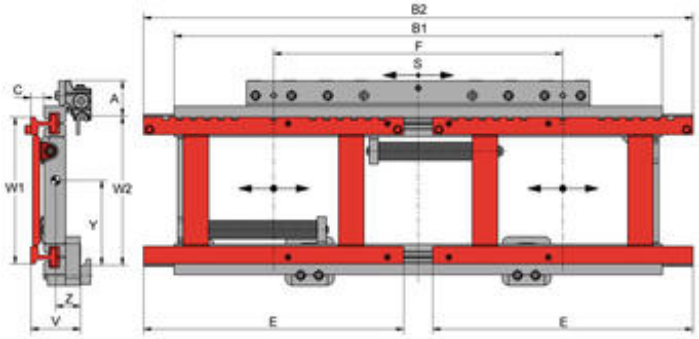

2 hydraulik functions 1)

Model	Cap. per fork pair kg	LCD mm	W1 ISO	W2 ISO	A mm	B1 mm	B2 mm	C mm	E mm	F mm	S mm	V mm	CofG Z mm	CofG$_V$ Y mm	Weight kg	Price 人民币
2T253B-L	1.250	600	2	2	98	1.350	1.520	36	720	800-1.200	±100	138	66	234	191	On request
2T253B-L/Q	1.250	600	2	2	98	1.550	1.600	36	800	800-1.440	±100	138	67	231	207	On request
3T253B-L	1.750	600	2	3	85	1.350	1.520	36	720	800-1.200	±100	138	64	255	223	On request
3T253B-L/Q	**1.750**	**600**	**2**	**3**	**85**	**1.550**	**1.600**	**36**	**800**	**800-1.440**	**±100**	**138**	**66**	**252**	**241**	**On request**
4,5T253B-L	2.000	600	2	3	85	1.350	1.520	36	720	800-1.200	±100	148	66	262	277	On request
4,5T253B-L/Q	2.000	600	2	3	85	1.550	1.600	36	800	800-1.440	±100	148	67	258	299	On request
4,5T253B-Q	2.000	600	2	3	85	1.650	1.960	36	980	980-1.540	±100	148	69	255	317	On request
5T253B-L	2.750	600	3	4	118	1.460	1.520	40	720	800-1.200	±100	153	74	319	352	On request
5T253B-L/Q	2.750	600	3	4	118	1.550	1.600	40	800	800-1.440	±100	153	75	317	368	On request
6T253B-L	2.000	1.200	4	4	135	1.460	1.520	56	720	800-1.200	±160	178	81	366	431	On request
6T253B-L/Q	2.000	1.200	4	4	135	1.600	1.600	56	800	800-1.440	±160	178	82	363	457	On request

L = Pallet handling lengthwise / Q = Pallet handling crosswise. / L / Q = Pallet handling lengthwise and crosswise.
1) Alternatively available with solenoid valve for individual adjustment of the fork carriages.
Forks see model T180.
Please observe necessary fork shank under-clearance.
Capacities of 3T upwards with SOFTSTOP end-of-stroke slow-down.
Higher capacities and other construction widths available upon request.
Load Backrest see model T179.

Triple Sideshifter T253B



