Fork Clamp T411 (24.11.2026)

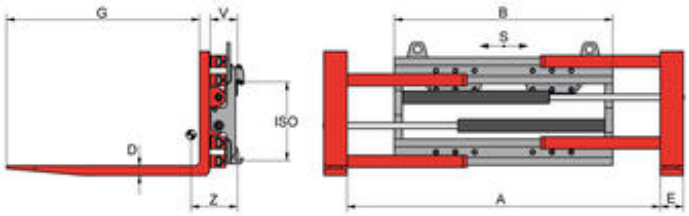

with independent sideshift - 2 hydraulic functions - also availabe with round forks

Model	Cap. on forks kg	LCD mm	Cap. as clamp kg	LCD mm	S mm	VSmax mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
1T411	1.500	500	700	500	±100	-	340-1.300	750	40	100	1.200	2	133	268	236	On request	On request
1T411	1.500	500	700	500	±100	-	340-1.520	970	40	100	1.200	2	133	251	258	On request	On request
1T411	1.500	500	700	500	±100	-	350-1.700	1.130	40	100	1.200	2	133	244	269	On request	On request
1T411	1.500	500	700	500	±100	-	330-1.730	1.200	40	100	1.200	2	133	241	273	On request	On request
1,5T411	2.300	500	1.250	500	±100	-	320-1.500	970	45	120	1.200	2	133	266	323	On request	On request
1,5T411	2.300	500	1.250	500	±100	-	40-940	970	45	120	1.200	2	133	254	312	On request	On request
1,5T411	2.300	500	1.250	500	±100	-	330-1.680	1.130	45	120	1.200	2	133	253	335	On request	On request
1,5T411	2.300	500	1.250	500	±100	-	90-1.270	1.200	45	120	1.200	2	133	252	336	On request	On request
1,5T411	2.300	500	1.250	500	±100	-	310-1.710	1.200	45	120	1.200	2	133	270	339	On request	On request
1,5T401	2.300	500	1.250	500	-	-	260-1.260	850	45	120	1.200	2	126	260	300	On request	On request
2T411	2.800	500	2.000	500	±100	-	280-1.380	970	50	120	1.200	2	143	262	384	On request	On request
2T411	2.800	500	2.000	500	±100	-	320-1.620	1.130	50	120	1.200	2	143	257	396	On request	On request
2T411	2.800	500	2.000	500	±100	-	70-1.120	1.130	50	120	1.200	2	143	259	391	On request	On request
2T411	2.800	500	2.000	500	±100	-	120-1.420	1.330	50	120	1.200	2	143	252	408	On request	On request
2T411	2.800	500	2.000	500	±100	-	320-1.820	1.330	50	120	1.200	2	143	250	412	On request	On request
2T411	2.800	500	2.000	500	±100	-	280-1.380	970	50	120	1.200	3	143	262	384	On request	On request
2T411	2.800	500	2.000	500	±100	-	320-1.620	1.130	50	120	1.200	3	143	257	396	On request	On request
2T411	2.800	500	2.000	500	±100	-	70-1.120	1.130	50	120	1.200	3	143	259	391	On request	On request
2T411	2.800	500	2.000	500	±100	-	120-1.420	1.330	50	120	1.200	3	143	252	408	On request	On request
2T411	2.800	500	2.000	500	±100	-	320-1.820	1.330	50	120	1.200	3	143	250	412	On request	On request

Model	Cap. on forks kg	LCD mm	Cap. as clamp kg	LCD mm	S mm	VSmax mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
2T401	2.800	500	2.000	500	-	-	300-1.300	850	50	120	1.200	2	136	282	339	On request	On request
2T401	2.800	500	2.000	500	-	-	300-1.300	850	50	120	1.200	3	136	282	339	On request	On request
3T411	**3.600**	**500**	**2.500**	**500**	**±100**	**-**	**260-1.560**	**1.130**	**50**	**150**	**1.200**	**3**	**152**	**255**	**510**	**On request**	**On request**
3T411	**3.600**	**500**	**2.500**	**500**	**±100**	**-**	**260-1.760**	**1.330**	**50**	**150**	**1.200**	**3**	**152**	**249**	**529**	**On request**	**On request**
3T411	**3.600**	**500**	**2.500**	**500**	**±100**	**-**	**130-1.630**	**1.460**	**50**	**150**	**1.200**	**3**	**152**	**245**	**539**	**On request**	**On request**
3T411	**3.600**	**500**	**2.500**	**500**	**±100**	**-**	**260-1.890**	**1.460**	**50**	**150**	**1.200**	**3**	**152**	**245**	**541**	**On request**	**On request**
4T411	**4.150**	**500**	**2.900**	**500**	**±100**	**-**	**260-1.560**	**1.130**	**50**	**150**	**1.200**	**3**	**162**	**245**	**572**	**On request**	**On request**
4T411	**4.150**	**500**	**2.900**	**500**	**±100**	**-**	**260-1.760**	**1.330**	**50**	**150**	**1.200**	**3**	**162**	**240**	**591**	**On request**	**On request**
4T411	**4.150**	**500**	**2.900**	**500**	**±100**	**-**	**130-1.630**	**1.460**	**50**	**150**	**1.200**	**3**	**162**	**237**	**603**	**On request**	**On request**
4T411	**4.150**	**500**	**2.900**	**500**	**±100**	**-**	**260-1.890**	**1.460**	**50**	**150**	**1.200**	**3**	**162**	**236**	**606**	**On request**	**On request**
4,5T411	**5.000**	**500**	**3.500**	**500**	**±100**	**-**	**230-1.480**	**1.200**	**60**	**150**	**1.200**	**3**	**188**	**253**	**689**	**On request**	**On request**
4,5T411	**5.000**	**500**	**3.500**	**500**	**±100**	**-**	**250-1.650**	**1.330**	**60**	**150**	**1.200**	**3**	**188**	**248**	**709**	**On request**	**On request**
4,5T411	**5.000**	**500**	**3.500**	**500**	**±100**	**-**	**120-1.520**	**1.460**	**60**	**150**	**1.200**	**3**	**188**	**245**	**725**	**On request**	**On request**
4,5T411	**5.000**	**500**	**3.500**	**500**	**±100**	**-**	**220-1.720**	**1.460**	**60**	**150**	**1.200**	**3**	**188**	**244**	**728**	**On request**	**On request**
4,5T411	**5.000**	**500**	**3.500**	**500**	**±100**	**-**	**260-1.890**	**1.550**	**60**	**150**	**1.200**	**3**	**188**	**241**	**744**	**On request**	**On request**
4,5T411.1	5.000	500	3.500	500	±100	-	230-1.480	1.200	60	150	1.200	3	178	249	677	On request	On request
4,5T411.1	5.000	500	3.500	500	±100	-	250-1.650	1.330	60	150	1.200	3	178	245	695	On request	On request
4,5T411.1	5.000	500	3.500	500	±100	-	220-1.720	1.460	60	150	1.200	3	178	242	711	On request	On request
4,5T411.1	5.000	500	3.500	500	±100	-	260-1.890	1.550	60	150	1.200	3	178	239	724	On request	On request
4,8T411	5.000	600	3.200	600	±100	-	230-1.480	1.200	70	150	1.200	3	178	273	723	On request	On request
4,8T411	5.000	600	3.200	600	±100	-	250-1.650	1.330	70	150	1.200	3	178	269	741	On request	On request
4,8T411	5.000	600	3.200	600	±100	-	220-1.720	1.460	70	150	1.200	3	178	265	757	On request	On request
4,8T411	5.000	600	3.200	600	±100	-	260-1.890	1.550	70	150	1.200	3	178	262	770	On request	On request
5T411	6.200	600	3.500	600	±160	-	240-1.740	1.460	70	150	1.200	4	176	244	855	On request	On request
5T411	6.200	600	3.500	600	±160	-	280-1.910	1.550	70	150	1.200	4	176	242	868	On request	On request
5T411	6.200	600	3.500	600	±160	-	550-2.450[1)]	1.550	70	150	1.200	4	176	234	933	On request	On request
5T411	6.200	600	3.500	600	±160	-	280-2.180	1.820	70	150	1.200	4	176	236	905	On request	On request
6T411B	8.000	600	4.800	600	±160	-	180-1.810	1.550	60	200	1.200	4	219	238	1.410	On request	On request

Model	Cap. on forks kg	LCD mm	Cap. as clamp kg	LCD mm	S mm	VSmax mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
6T411B	8.000	600	4.800	600	±160	-	140-2.040	1.860	60	200	1.200	4	219	229	1.499	On request	On request
6T411B	8.000	600	4.800	600	±160	-	340-2.440	1.860	60	200	1.200	4	219	229	1.506	On request	On request
8T411B	8.000	900	6.500	600	VSS	±550	310-2.510	2.200	70	200	1.200	4	258	232	1.820	On request	On request

The Fork Clamp can be used for the transportation of palletised goods as well as for clamping purposes.
Slip-on arms in different versions easily turn the Fork Clamp into a special clamp.
1) Transport of europallets lengthwise not possible.
Also available without sideshift, model T401
Fork Positioner with cylinder- and sideshift protection upon request.
Load Backrest see model T179.
With screw-on forks available upon request T411A

Fork Clamp T411



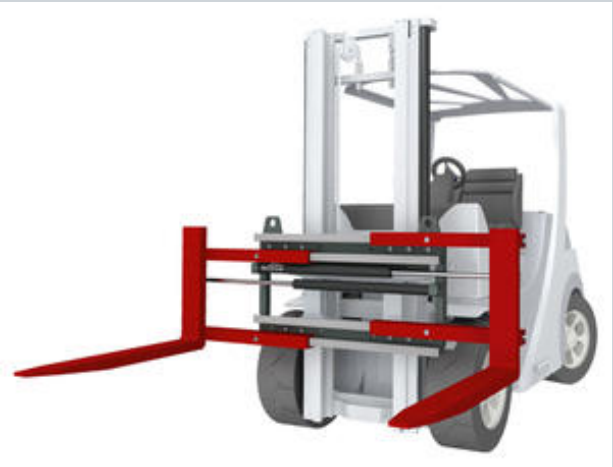

Specification:

The variously applicable Fork Clamp T411

is the base for all clamps of KAUP. Therefore, this attachment

particularly suitable for hard use can be adapted very well to the

individual demands. No matter, whether different hook-on fork cross

sections for divergent charges, changed hook-on fork forms or the

combination with other attachments: KAUP makes it possible.

Qualities:

- For hard onsets suitable
- Good visibility conditions
- Good residual capacity
- Independent sideshift serially
- Screw-on forks and round prongs optionally
- Load backrest optionally
- Optionally the most different puttable on clamp arms