

with valveblock sideshift dependent on the opening range - 2 hydraulic functions

## Technical Data

Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
<b>4T411BZI</b>	4.500	500	330-2.530	2.030	60	120	1.200	±550	139	138	848	On request	On request
<b>5T411BZI</b>	6.300	600	220-1.850	1.550	60	150	1.200	±407,5	159	193	840	On request	On request
<b>5T411BZI</b>	6.300	600	180-2.080	1.860	60	150	1.200	±475	159	185	902	On request	On request
<b>5T411BZI</b>	6.300	600	380-2.480 <sup>1)</sup>	1.860	60	150	1.200	±525	159	185	906	On request	On request
<b>5T411BZI</b>	6.300	600	310-2.510 <sup>1)</sup>	2.030	60	150	1.200	±550	159	181	936	On request	On request
<b>6T411BZI</b>	8.000	600	170-1.800	1.550	60	200	1.200	±407,5	169	223	1.057	On request	On request
<b>6T411BZI</b>	8.000	600	130-2.030	1.860	60	200	1.200	±475	169	216	1.117	On request	On request
<b>6T411BZI</b>	8.000	600	330-2.430 <sup>1)</sup>	1.860	60	200	1.200	±525	169	215	1.121	On request	On request
<b>6T411BZI</b>	8.000	600	200-3.800 <sup>1)</sup>	3.390	50	300	1.200	±900	169	208	1.437	On request	On request
<b>8T411BZI</b>	8.000	900	330-2.530 <sup>1)</sup>	2.000	70	200	1.200	±550	188	199	1.424	On request	On request
<b>8T411BZI</b>	8.000	900	400-2.900 <sup>1)</sup>	2.400	70	200	1.200	±625	188	191	1.532	On request	On request

1) Transport of europallets lengthwise not possible.

CofG and weight measurements do not take the cheek plates into account.


Fork carriage drawings, roller studs and chain anchors to be supplied by customer if necessary.

Not suitable for clamping between the forks.

with screw-on forks available upon request: T411BZIA

Load Backrest see model T179.

Also available without sideshift, model T401BZI

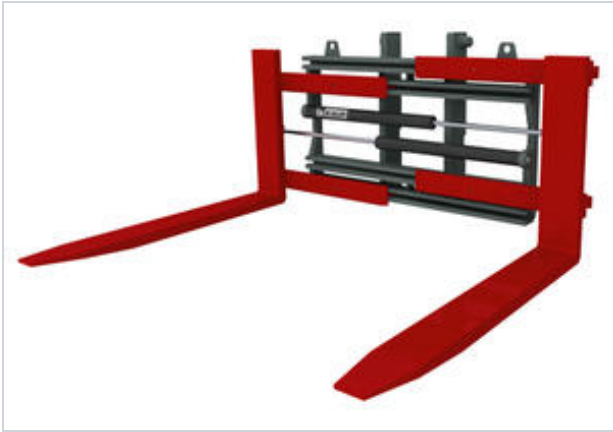

### Specification:

The KAUP integrated Fork Positioner

T411BZI is a robust attachment with very large opening ranges suitable for exceptionally heavy duty operation - ideal for uneven surfaces. The construction gives an optimal view to the fork tips. The residual capacity is, due to the integration in the mast of the forklift truck, higher than the T411BZ range.

---

### Qualities:

- Very large opening ranges
- Valve block sideshift - dependent on opening range - serially
- Screw-on forks optional