
Fork Clamp with Turnable Forks T411D (12.11.2026)

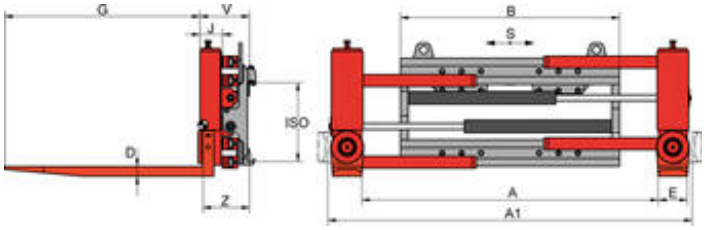

with independent sideshift - Fork length max. 1.300 mm - 2 hydraulic functions

Model	Cap. on forks kg	Cap. as clamp kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	A1 mm	J mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price for fork length 1.300 mm 人民币
1T411D	**1.500**	**700**	**500**	**±100**	**310-1.490**	**970**	**40**	**100**	**1.200**	**580-1.760**	**110**	**2**	**248**	**245**	**331**	**On request**	**On request**
1,5T411D	**2.000**	**1.250**	**500**	**±100**	**110-1.110**	**970**	**40**	**120**	**1.200**	**400-1.400**	**110**	**2**	**248**	**267**	**343**	**On request**	**On request**
1,5T411D	**2.000**	**1.250**	**500**	**±100**	**290-1.470**	**970**	**40**	**120**	**1.200**	**580-1.760**	**110**	**2**	**248**	**263**	**353**	**On request**	**On request**
1,5T411D	**2.000**	**1.250**	**500**	**±100**	**300-1.650**	**1.130**	**40**	**120**	**1.200**	**590-1.940**	**110**	**2**	**248**	**257**	**364**	**On request**	**On request**
1,5T411D	**2.000**	**1.250**	**500**	**±100**	**280-1.680**	**1.200**	**40**	**120**	**1.200**	**570-1.970**	**110**	**2**	**248**	**254**	**369**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**220-1.420**	**1.040**	**50**	**150**	**1.200**	**570-1.770**	**110**	**2**	**258**	**305**	**450**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**130-1.330**	**1.130**	**50**	**150**	**1.200**	**480-1.680**	**110**	**2**	**258**	**302**	**456**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**230-1.530**	**1.130**	**50**	**150**	**1.200**	**580-1.880**	**110**	**2**	**258**	**301**	**458**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**230-1.730**	**1.330**	**50**	**150**	**1.200**	**580-2.080**	**110**	**2**	**258**	**294**	**473**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**220-1.420**	**1.040**	**50**	**150**	**1.200**	**570-1.770**	**110**	**3**	**258**	**305**	**450**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**130-1.330**	**1.130**	**50**	**150**	**1.200**	**480-1.680**	**110**	**3**	**258**	**302**	**456**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**230-1.530**	**1.130**	**50**	**150**	**1.200**	**580-1.880**	**110**	**3**	**258**	**301**	**458**	**On request**	**On request**
2T411D	**2.800**	**2.000**	**500**	**±100**	**230-1.730**	**1.330**	**50**	**150**	**1.200**	**580-2.080**	**110**	**3**	**258**	**294**	**473**	**On request**	**On request**
3T411D	3.600	2.500	500	±100	225-1.525	1.130	60	150	1.200	605-1.905	130	3	288	287	573	On request	On request
3T411D	3.600	2.500	500	±100	225-1.855	1.460	60	150	1.200	605-2.235	130	3	288	276	604	On request	On request

Hydraulically turnable forks available upon request.
Slip-on arms for the forks model T103A and T103AG
Also available without sideshift, model T401D
Load Backrest see model T179.
Fork length max. 1.300 mm


Fork Clamp with Turnable Forks T411D









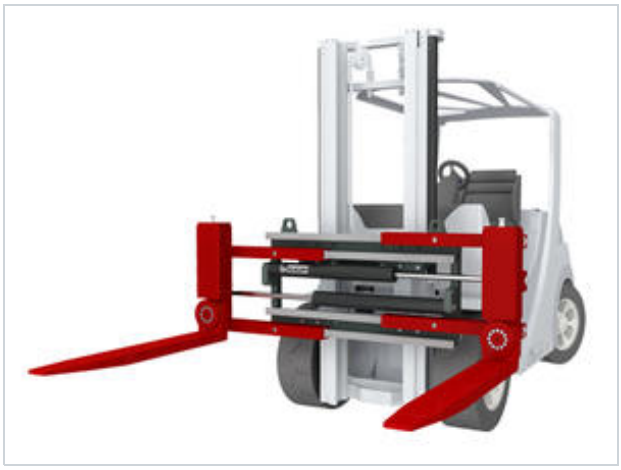

Specification:

Flexibility is the motto of the KAUP

Fork Clamp with Turnable Forks T411D. This clamp is a very universally applicable attachment, because the carrying part of the hook-on forks is turnable by ± 90 °. Therefore, the rotary hook-on fork clamp can be used for hook-on fork works as well as the clamps by bale, boxes and

cardboards. If the carrying part are turned only around by 45 °,

besides, the transport of barrels or other cylindrical bodies is easily

possible.

Qualities:

- Suitably to the

  Handling of the most different load forms - palettised product, grid

  boxing, underrun loads (basic position), barrels and cylindrical bodies

  (45 ° positions), bales, clamps, cardboards etc. (90 ° positions)

- Very good visibility conditions
- Independent sideshift serially
- Load backrest optionally
- Puttable on clamp arms optionally