

with independent sideshift - with mechano-hydraulic equilibration pistons - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G ¹⁾ mm	ISO	V mm	CofG Z mm	CofG _v Y mm	Weight kg	Price 人民币
1,5T412H	1.250	500	±100	260-1.440	970	80	175	1.024	2	133	287	161	422	On request

2T412H	2.000	500	±100	270-1.570	1.130	80	175	1.188	2	143	310	160	481	On request
2T412H	2.000	500	±100	270-1.570	1.130	80	175	1.188	3	143	310	160	481	On request
2T412H	2.000	500	±100	270-1.570	1.130	80	175	1.270	2	143	334	156	492	On request
2T412H	2.000	500	±100	270-1.570	1.130	80	175	1.270	3	143	334	156	492	On request

3T412H	2.500	500	±100	230-1.530	1.130	80	195	1.270	3	152	333	170	609	On request
3T412H	2.500	500	±100	230-1.860	1.460	80	195	1.270	3	152	323	173	636	On request

4,5T412H	3.200	600	±100	240-1.740	1.330	80	195	1.270	3	188	297	187	770	On request
4,5T412H	3.200	600	±100	240-1.870	1.460	80	195	1.270	3	188	291	190	795	On request



5T412H	3.500	600	±160	220-1.850	1.550	80	205	1.270	4	176	230	276	920	On request
---------------	-------	-----	------	-----------	-------	----	-----	-------	---	-----	-----	-----	-----	------------

HG = Rubber coating Ø 75, HV = Polyurethane coating Ø 75, HV-Q = Square Polyurethane buffers 75 x 75 mm, HS = steel disc Ø 65, HS-Q = Square steel buffers 80 x 80 mm

1) Length G depends on the number of pistons (): available arm length 942 (11), 1.024 (12), 1.106 (13), 1.188 (14), 1.270 (15)

Also available without sideshift, model T402H

Load Backrest see model T179.

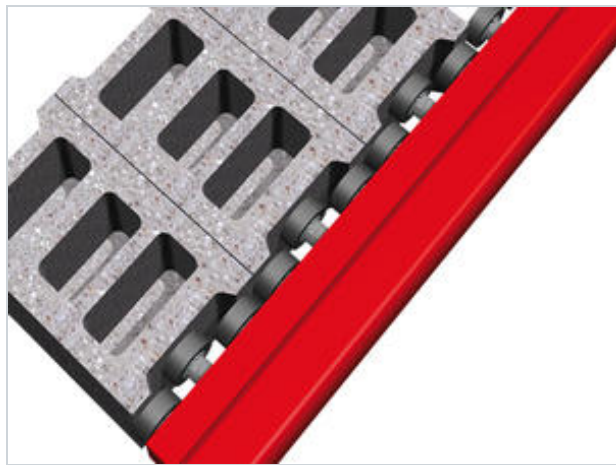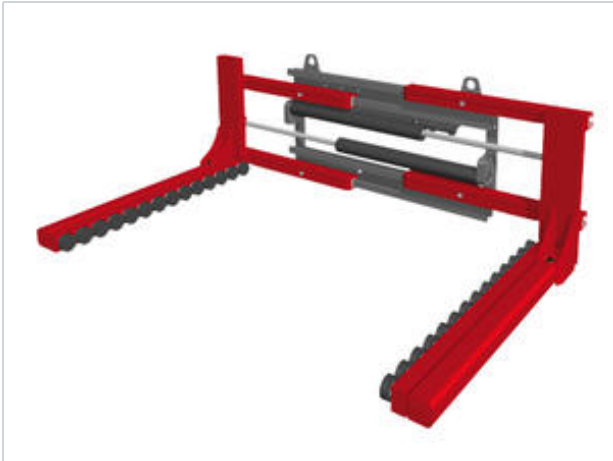

Specification:

KAUP Block and Brick Clamps T412H are used for handling small format blocks such as building bricks and paving stones. The grease filled clamping arms of this attachment have mechano-hydraulic equilibration pistons with different coatings. They adapt to irregular shaped loads and can therefore clamp the load as required. Steel plates for handling rough, hard, heavy concrete blocks, rubber coating for pick up of aerated concrete blocks and Vulcollan coating as an all-rounder are just some of the possibilities available.

Qualities:

- Low lost load centre - excellent residual capacity
- Very good visibility conditions

- Independent sideshift serially
- Different kinds of equalising buffers on offer
- Load Backrest optionally