

with independent sideshift - with slip-on underslung arms - to handle building material - 2 hydraulic functions, Fork Clamp T411 underslung version (with hydraulic equilibration pistons) T102UH

Technical Data

| Model | Cap. on forks kg | LCD mm | Cap. as clamp kg | LCD mm | S mm | A1 mm | A mm | B mm | D mm | E mm | E1 mm | G mm | ISO | V mm | CofG Z mm | CofG _v Y mm | Weight kg | Price 人民币 |
|-----------|---------------------|-----------|---------------------|-----------|---------|-----------|-----------|---------|---------|---------|----------|---------|-----|---------|-----------------|------------------------------|--------------|--------------|
| 1,5T412UH | 2.300 | 500 | 1.250 | 500 | ±100 | 140-1.320 | 320-1.500 | 970 | 45 | 120 | 210 | 1.200 | 2 | 133 | 456 | 74 | 500 | On request |
| 2T412UH | 2.800 | 500 | 2.000 | 500 | ±100 | 140-1.440 | 320-1.620 | 1.130 | 50 | 120 | 210 | 1.200 | 2 | 143 | 432 | 89 | 564 | On request |
| 2T412UH | 2.800 | 500 | 2.000 | 500 | ±100 | 140-1.440 | 320-1.620 | 1.130 | 50 | 120 | 210 | 1.200 | 3 | 143 | 432 | 89 | 564 | On request |
| 3T412UH | 3.600 | 500 | 2.500 | 500 | ±100 | 80-1.380 | 260-1.560 | 1.130 | 50 | 150 | 235 | 1.200 | 3 | 152 | 406 | 113 | 679 | On request |
| 3T412UH | 3.600 | 500 | 2.500 | 500 | ±100 | 80-1.580 | 260-1.760 | 1.330 | 50 | 150 | 235 | 1.200 | 3 | 152 | 397 | 117 | 698 | On request |
| 3T412UH | 3.600 | 500 | 2.500 | 500 | ±100 | 80-1.710 | 260-1.890 | 1.460 | 50 | 150 | 235 | 1.200 | 3 | 152 | 391 | 120 | 710 | On request |
| 4,5T412UH | 5.000 | 500 | 3.200 | 600 | ±100 | 40-1.540 | 220-1.720 | 1.460 | 60 | 150 | 240 | 1.200 | 3 | 188 | 370 | 142 | 895 | On request |
| 5T412UH | 6.200 | 600 | 3.500 | 600 | ±160 | 100-1.730 | 280-1.910 | 1.550 | 70 | 150 | 240 | 1.200 | 4 | 176 | 343 | 201 | 1.060 | On request |





HG = Rubber coating Ø 75mm, HV = Polyurethane coating Ø 75mm, HV-Q = Square Polyurethane buffers 75 x 75mm, HS = steel disc Ø 60mm, HS-Q = Square steel buffers 80 x 80mm

Length G depends on the number of pistons (): available arm length 937 (11), 1.019 (12), 1.101 (13), 1.183 (14), 1.265 (15)

Also available without sideshift, model T402UH

Available with cylinder- and sideshift protection upon request

Load Backrest see model T179.

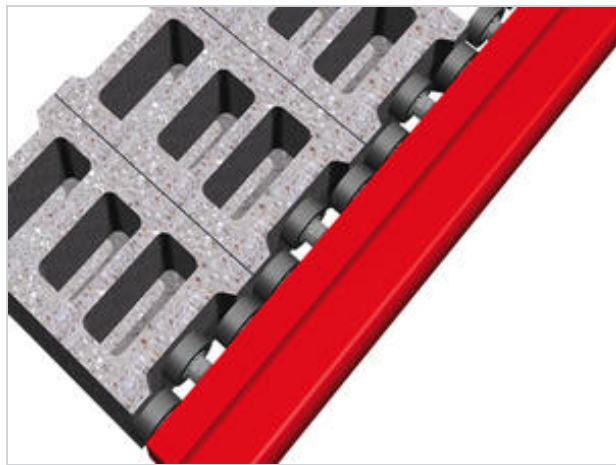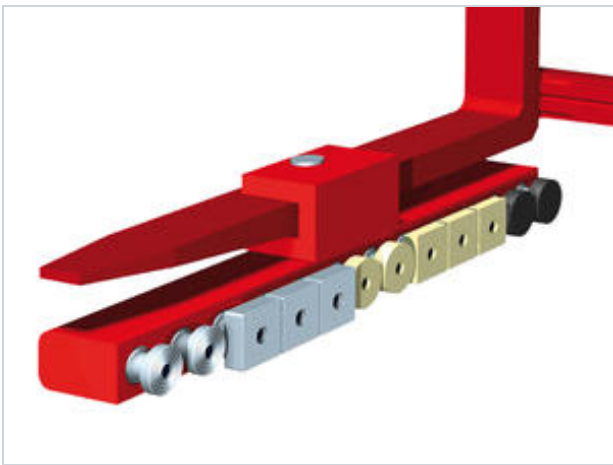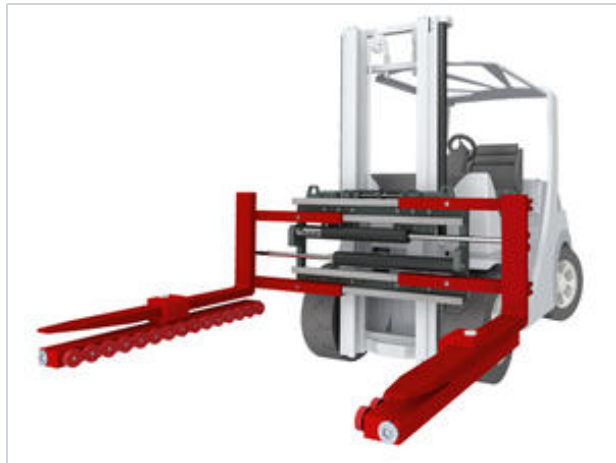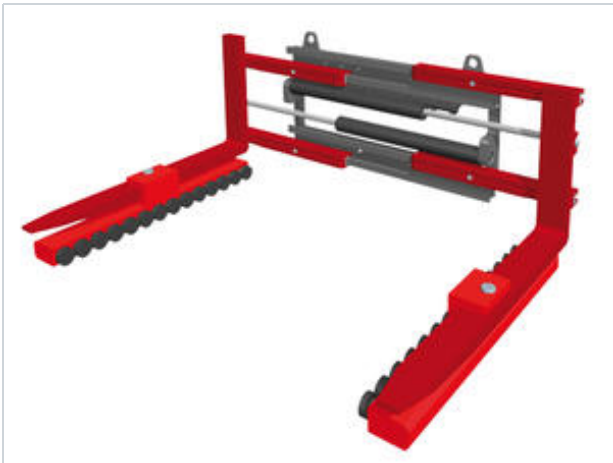

Specification:

With the KAUP Block & Brick Clamp

T412UH it is easy to change between pick up of pallets or grate boxes and handling packets of blocks because this attachment can be used as a Block Clamp and also as a Fork Clamp. Therefore they are typically used in the building industry.

The underslung Block Arms with mechano-hydraulic equalising are suitable for handling small sized blocks. They are mounted oscillating on the carrying part of the existing forks and secured.

Qualities:

Low lost load centre - excellent residual capacity

- Very good visibility conditions
- Low entry measurements required
- Simple assembly
- Independent sideshift serially
- Different kinds of equalising buffers on offer
- Load Backrest optionally