
Bale Clamp, Pulp Bale Clamp T413 (12.11.2026)

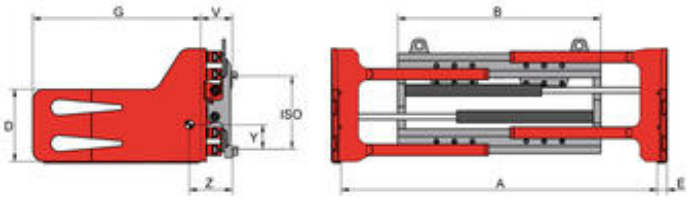

with valveblock sideshift dependent on the opening range - 2 hydraulic functions


Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	ISO	V mm	CofG Z mm	CofG$_v$ Y mm	Weight kg	Price 人民币
1,5T413	1.400	500	495-1.675	970	440	37	800	±295	2	156	225	229	352	On request
1,5T413	**1.400**	**500**	**495-1.675**	**970**	**440**	**37**	**1.000**	**±295**	**2**	**156**	**288**	**221**	**388**	**On request**
1,5T413	**1.400**	**500**	**495-1.675**	**970**	**440**	**37**	**1.200**	**±295**	**2**	**156**	**359**	**220**	**433**	**On request**
1,5T413	1.400	500	425-1.605	1.040	440	37	800	±295	2	156	224	228	356	On request
1,5T413	**1.400**	**500**	**425-1.605**	**1.040**	**440**	**37**	**1.000**	**±295**	**2**	**156**	**286**	**220**	**392**	**On request**
1,5T413	**1.400**	**500**	**425-1.605**	**1.040**	**440**	**37**	**1.200**	**±295**	**2**	**156**	**356**	**219**	**437**	**On request**
1,5T413	1.400	500	495-1.745	1.040	440	37	800	±312,5	2	156	223	228	357	On request
1,5T413	**1.400**	**500**	**495-1.745**	**1.040**	**440**	**37**	**1.000**	**±312,5**	**2**	**156**	**285**	**220**	**393**	**On request**
1,5T413	**1.400**	**500**	**495-1.745**	**1.040**	**440**	**37**	**1.200**	**±312,5**	**2**	**156**	**355**	**219**	**438**	**On request**
1,5T413	1.400	500	480-1.880	1.200	440	37	800	±350	2	156	218	228	368	On request
1,5T413	**1.400**	**500**	**480-1.880**	**1.200**	**440**	**37**	**1.000**	**±350**	**2**	**156**	**280**	**220**	**404**	**On request**
1,5T413	**1.400**	**500**	**480-1.880**	**1.200**	**440**	**37**	**1.200**	**±350**	**2**	**156**	**348**	**219**	**449**	**On request**
2T413	**2.100**	**500**	**575-1.875**	**1.040**	**440**	**42**	**1.000**	**±325**	**2**	**171**	**288**	**220**	**458**	**On request**
2T413	**2.100**	**500**	**575-1.875**	**1.040**	**440**	**42**	**1.200**	**±325**	**2**	**171**	**359**	**222**	**516**	**On request**
2T413	**2.100**	**500**	**575-1.875**	**1.040**	**440**	**42**	**1.000**	**±325**	**3**	**171**	**288**	**220**	**458**	**On request**
2T413	**2.100**	**500**	**575-1.875**	**1.040**	**440**	**42**	**1.200**	**±325**	**3**	**171**	**359**	**222**	**516**	**On request**
2T413	**2.100**	**500**	**485-1.785**	**1.130**	**440**	**42**	**1.000**	**±325**	**2**	**171**	**286**	**221**	**463**	**On request**
2T413	**2.100**	**500**	**485-1.785**	**1.130**	**440**	**42**	**1.200**	**±325**	**2**	**171**	**356**	**222**	**521**	**On request**
2T413	**2.100**	**500**	**485-1.785**	**1.130**	**440**	**42**	**1.000**	**±325**	**3**	**171**	**286**	**221**	**463**	**On request**
2T413	**2.100**	**500**	**485-1.785**	**1.130**	**440**	**42**	**1.200**	**±325**	**3**	**171**	**356**	**222**	**521**	**On request**
2T413	**2.100**	**500**	**485-1.985**	**1.330**	**440**	**42**	**1.000**	**±375**	**2**	**171**	**279**	**222**	**477**	**On request**
2T413	**2.100**	**500**	**485-1.985**	**1.330**	**440**	**42**	**1.200**	**±375**	**2**	**171**	**349**	**223**	**536**	**On request**
2T413	**2.100**	**500**	**485-1.985**	**1.330**	**440**	**42**	**1.000**	**±375**	**3**	**171**	**279**	**222**	**477**	**On request**
2T413	**2.100**	**500**	**485-1.985**	**1.330**	**440**	**42**	**1.200**	**±375**	**3**	**171**	**349**	**223**	**536**	**On request**
2T413	2.100	500	595-2.395	1.520	440	42	1.000	±450	2	171	263	225	516	On request
2T413	2.100	500	595-2.395	1.520	440	42	1.200	±450	2	171	329	226	574	On request
2T413	2.100	500	595-2.395	1.520	440	42	1.000	±450	3	171	263	225	516	On request
2T413	2.100	500	595-2.395	1.520	440	42	1.200	±450	3	171	329	226	574	On request
3T413	2.500	500	575-1.975	1.130	470	47	1.000	±350	2	175	282	235	545	On request
3T413	**2.500**	**500**	**575-1.975**	**1.130**	**470**	**47**	**1.200**	**±350**	**2**	**175**	**349**	**228**	**598**	**On request**
3T413	1.560	800	575-1.975	1.130	470	47	1.600	±350	2	175	487	222	690	On request
3T413	2.500	500	575-1.975	1.130	470	47	1.000	±350	3	175	282	235	545	On request


Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	ISO	V mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
3T413	**2.500**	**500**	**575-1.975**	**1.130**	**470**	**47**	**1.200**	**±350**	**3**	**175**	**349**	**228**	**598**	**On request**
3T413	1.560	800	575-1.975	1.130	470	47	1.600	±350	3	175	487	222	690	On request
3T413	2.500	500	605-2.235	1.330	470	47	1.000	±407,5	2	175	275	236	564	On request
3T413	**2.500**	**500**	**605-2.235**	**1.330**	**470**	**47**	**1.200**	**±407,5**	**2**	**175**	**341**	**229**	**618**	**On request**
3T413	1.560	800	605-2.235	1.330	470	47	1.600	±407,5	2	175	476	223	709	On request
3T413	2.500	500	605-2.235	1.330	470	47	1.000	±407,5	3	175	275	236	564	On request
3T413	**2.500**	**500**	**605-2.235**	**1.330**	**470**	**47**	**1.200**	**±407,5**	**3**	**175**	**341**	**229**	**618**	**On request**
3T413	1.560	800	605-2.235	1.330	470	47	1.600	±407,5	3	175	476	223	709	On request
3T413	2.500	500	645-2.445	1.460	470	47	1.000	±450	2	175	266	237	593	On request
3T413	2.500	500	645-2.445	1.460	470	47	1.200	±450	2	175	329	231	647	On request
3T413	1.560	800	645-2.445	1.460	470	47	1.600	±450	2	175	462	224	737	On request
3T413	2.500	500	645-2.445	1.460	470	47	1.000	±450	3	175	266	237	593	On request
3T413	2.500	500	645-2.445	1.460	470	47	1.200	±450	3	175	329	231	647	On request
3T413	1.560	800	645-2.445	1.460	470	47	1.600	±450	3	175	462	224	737	On request
4T413	3.000	500	575-1.975	1.130	470	47	1.200	±350	3	185	332	279	697	On request
4T413	2.140	700	575-1.975	1.130	470	47	1.400	±350	3	185	399	274	761	On request
4T413	1.880	800	575-1.975	1.130	470	47	1.600	±350	3	185	457	267	789	On request
4T413	3.000	500	475-1.975	1.330	470	47	1.200	±375	3	185	325	280	715	On request
4T413	2.140	700	475-1.975	1.330	470	47	1.400	±375	3	185	392	275	779	On request
4T413	1.880	800	475-1.975	1.330	470	47	1.600	±375	3	185	449	268	808	On request
4T413	3.000	500	605-2.235	1.330	470	47	1.200	±407,5	3	185	324	280	718	On request
4T413	2.140	700	605-2.235	1.330	470	47	1.400	±407,5	3	185	391	275	782	On request
4T413	1.880	800	605-2.235	1.330	470	47	1.600	±407,5	3	185	448	268	810	On request
4T413	3.000	500	635-2.435	1.460	470	47	1.200	±450	3	185	317	281	743	On request
4T413	2.140	700	635-2.435	1.460	470	47	1.400	±450	3	185	382	276	807	On request
4T413	1.880	800	635-2.435	1.460	470	47	1.600	±450	3	185	437	270	834	On request
4,5T413	3.200	600	595-1.995	1.200	470	52	1.200	±350	3	216	323	241	816	On request
4,5T413	2.740	700	595-1.995	1.200	470	52	1.400	±350	3	216	388	236	877	On request
4,5T413	2.400	800	595-1.995	1.200	470	52	1.600	±350	3	216	443	235	933	On request
4,5T413	3.200	600	465-1.865	1.330	470	52	1.200	±350	3	216	319	240	828	On request
4,5T413	2.740	700	465-1.865	1.330	470	52	1.400	±350	3	216	384	235	889	On request
4,5T413	2.400	800	465-1.865	1.330	470	52	1.600	±350	3	216	439	235	945	On request
4,5T413	3.200	600	695-2.325	1.330	470	52	1.200	±407,5	3	216	311	241	865	On request
4,5T413	2.740	700	695-2.325	1.330	470	52	1.400	±407,5	3	216	373	236	926	On request
4,5T413	2.400	800	695-2.325	1.330	470	52	1.600	±407,5	3	216	427	236	982	On request
4,5T413	3.200	600	565-2.195	1.460	470	52	1.200	±407,5	3	216	314	240	848	On request
4,5T413	2.740	700	565-2.195	1.460	470	52	1.400	±407,5	3	216	377	235	909	On request
4,5T413	2.400	800	565-2.195	1.460	470	52	1.600	±407,5	3	216	432	234	964	On request
4,5T413	3.200	600	765-2.595	1.460	470	52	1.200	±457,5	3	216	307	241	884	On request
4,5T413	2.740	700	765-2.595	1.460	470	52	1.400	±457,5	3	216	368	236	945	On request
4,5T413	2.400	800	765-2.595	1.460	470	52	1.600	±457,5	3	216	421	235	1.001	On request
4,8T413	2.630	800	695-2.325	1.330	470	52	1.600	±407,5	3	211	421	277	1.002	On request
4,8T413	2.330	900	695-2.325	1.330	470	52	1.800	±407,5	3	211	491	275	1.082	On request
4,8T413	2.630	800	565-2.195	1.460	470	52	1.600	±407,5	3	211	425	277	985	On request

Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	ISO	V mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
4,8T413	2.330	900	565-2.195	1.460	470	52	1.800	±407,5	3	211	496	274	1.065	On request
5T413	2.900	800	555-2.175	1.550	470	52	1.600	±405	4	211	419	269	1.066	On request
5T413	2.600	900	555-2.175	1.550	470	52	1.800	±405	4	211	484	261	1.133	On request
5T413	2.900	800	545-2.445	1.820	470	52	1.600	±475	4	211	409	270	1.101	On request
5T413	2.600	900	545-2.445	1.820	470	52	1.800	±475	4	211	472	263	1.169	On request
5,5T413B	3.300	800	625-2.525	1.740	470	47	1.600	±475	4	249	370	291	1.320	On request
5,5T413B	2.200	1.000	625-2.525	1.740	470	47	1.800	±475	4	249	420	281	1.360	On request
6T413B	4.000	800	685-2.585	1.740	470	57	1.600	±475	4	259	399	284	1.453	On request
6T413B	3.300	1.000	685-2.585	1.740	470	57	1.800	±475	4	259	464	281	1.545	On request
6T413B	4.000	800	565-2.465	1.860	470	57	1.600	±475	4	259	394	285	1.474	On request
6T413B	3.300	1.000	565-2.465	1.860	470	57	1.800	±475	4	259	459	282	1.566	On request
6T413B	4.000	800	595-2.695	2.030	470	57	1.600	±525	4	259	387	286	1.511	On request
6T413B	3.300	1.000	595-2.695	2.030	470	57	1.800	±525	4	259	451	284	1.602	On request
6,5T413B	6.000	800	685-2.585	1.740	470	57	1.600	±475	4	269	392	286	1.510	On request
6,5T413B	4.000	1.000	685-2.585	1.740	470	57	1.800	±475	4	269	458	282	1.561	On request
6,5T413B	6.000	800	565-2.465	1.860	470	57	1.600	±475	4	269	388	286	1.531	On request
6,5T413B	4.000	1.000	565-2.465	1.860	470	57	1.800	±475	4	269	453	282	1.582	On request
6,5T413B	6.000	800	595-2.695	2.030	470	57	1.600	±525	4	269	380	288	1.571	On request
6,5T413B	4.000	1.000	595-2.695	2.030	470	57	1.800	±525	4	269	445	284	1.619	On request
6,5T413B	6.000	800	725-3.125	2.200	470	57	1.600	±600	4	269	373	290	1.616	On request
6,5T413B	4.000	1.000	725-3.125	2.200	470	57	1.800	±600	4	269	437	285	1.659	On request
8T413B	6.500	1.000	700-3.100	2.200	560	82	1.700	±600	4	340	481	337	2.858	On request
8T413B	6.500	1.000	700-3.100	2.200	560	82	2.000	±600	4	340	577	329	3.043	On request

Bale clamps with higher capacities available upon request.
Variations in width, opening ranges and arm dimensions available upon request.
Also available without sideshift, model T403
Also available with 1 arm oscillating, model T413B-1.
Special version for Big Bags, based on the KAUP Bale Clamp, are also available.
Load Backrest see model T179.

Bale Clamp, Pulp Bale Clamp T413

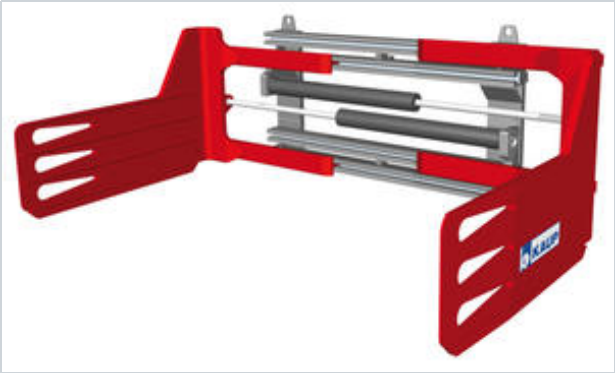

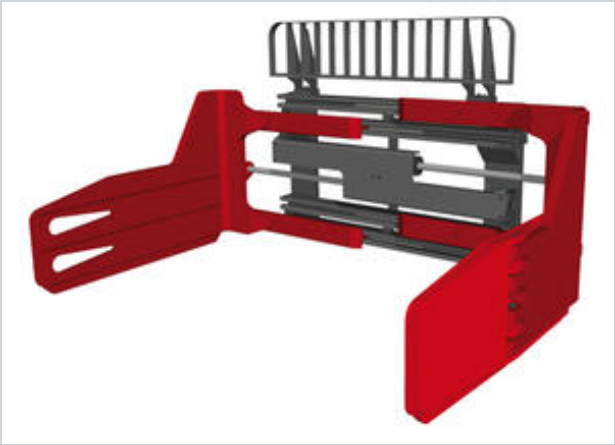

Specification:

KAUP attachments of the class T413

designed with high visibility are mainly used for in-plant,

non-palletised transportation of bales of paper, waste paper, tobacco

and textiles or also boxes and containers. Pulp, foamed plastic

(polystyrene) wool and Big-Bags can also be transported with specially

designed clamping arms.

Qualities:

- Excellent price-performance ratio
- Very good visibility
- Solid strengthened design with KAUP clamp profiles from T-profiles and C-profiles
- Solid slim arm design
- Valveblock sideshift serially
- Combination with KAUP rotary devices possible
- Customer specified modifications feasible