

with independent sideshift - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	CofG _v Y mm	Weight kg	Price 人民币
1,5T413	1.400	500	±100	495-1.675	970	440	37	800	2	163	227	236	354	On request
1,5T413	1.400	500	±100	495-1.675	970	440	37	1.000	2	163	289	228	390	On request
1,5T413	1.400	500	±100	495-1.675	970	440	37	1.200	2	163	359	227	436	On request
1,5T413	1.400	500	±100	425-1.605	1.040	440	37	800	2	163	227	235	358	On request
1,5T413	1.400	500	±100	425-1.605	1.040	440	37	1.000	2	163	289	227	394	On request
1,5T413	1.400	500	±100	425-1.605	1.040	440	37	1.200	2	163	358	226	440	On request
1,5T413	1.400	500	±100	495-1.745	1.040	440	37	800	2	163	226	235	359	On request
1,5T413	1.400	500	±100	495-1.745	1.040	440	37	1.000	2	163	288	227	395	On request
1,5T413	1.400	500	±100	495-1.745	1.040	440	37	1.200	2	163	358	226	441	On request
1,5T413	1.400	500	±100	480-1.880	1.200	440	37	800	2	163	222	235	377	On request
1,5T413	1.400	500	±100	480-1.880	1.200	440	37	1.000	2	163	283	227	413	On request
1,5T413	1.400	500	±100	480-1.880	1.200	440	37	1.200	2	163	351	226	459	On request

2T413	2.100	500	±100	575-1.875	1.040	440	42	1.000	2	163	292	228	462	On request
2T413	2.100	500	±100	575-1.875	1.040	440	42	1.200	2	163	363	228	520	On request
2T413	2.100	500	±100	575-1.875	1.040	440	42	1.000	3	163	292	228	462	On request
2T413	2.100	500	±100	575-1.875	1.040	440	42	1.200	3	163	363	228	520	On request
2T413	2.100	500	±100	485-1.785	1.130	440	42	1.000	2	163	290	228	467	On request
2T413	2.100	500	±100	485-1.785	1.130	440	42	1.200	2	163	360	228	525	On request
2T413	2.100	500	±100	485-1.785	1.130	440	42	1.000	3	163	290	228	467	On request
2T413	2.100	500	±100	485-1.785	1.130	440	42	1.200	3	163	360	228	525	On request
2T413	2.100	500	±100	485-1.985	1.330	440	42	1.000	2	163	283	229	482	On request
2T413	2.100	500	±100	485-1.985	1.330	440	42	1.200	2	163	352	229	540	On request
2T413	2.100	500	±100	485-1.985	1.330	440	42	1.000	3	163	283	229	482	On request
2T413	2.100	500	±100	485-1.985	1.330	440	42	1.200	3	163	352	229	540	On request
2T413	2.100	500	±100	595-2.395	1.520	440	42	1.000	2	163	267	231	520	On request
2T413	2.100	500	±100	595-2.395	1.520	440	42	1.200	2	163	333	231	578	On request
2T413	2.100	500	±100	595-2.395	1.520	440	42	1.000	3	163	267	231	520	On request
2T413	2.100	500	±100	595-2.395	1.520	440	42	1.200	3	163	333	231	578	On request

3T413	2.500	500	±100	575-1.975	1.130	470	47	1.000	2	182	271	248	582	On request
-------	-------	-----	------	-----------	-------	-----	----	-------	---	-----	-----	-----	-----	------------

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
3T413	2.500	500	±100	575-1.975	1.130	470	47	1.200	2	182	336	241	636	On request
3T413	1.560	800	±100	575-1.975	1.130	470	47	1.600	2	182	469	233	728	On request
3T413	2.500	500	±100	575-1.975	1.130	470	47	1.000	3	182	271	248	582	On request
3T413	2.500	500	±100	575-1.975	1.130	470	47	1.200	3	182	336	241	636	On request
3T413	1.560	800	±100	575-1.975	1.130	470	47	1.600	3	182	469	233	728	On request
3T413	2.500	500	±100	605-2.235	1.330	470	47	1.000	2	182	265	248	602	On request
3T413	2.500	500	±100	605-2.235	1.330	470	47	1.200	2	182	328	241	655	On request
3T413	1.560	800	±100	605-2.235	1.330	470	47	1.600	2	182	460	234	746	On request
3T413	2.500	500	±100	605-2.235	1.330	470	47	1.000	3	182	265	248	602	On request
3T413	2.500	500	±100	605-2.235	1.330	470	47	1.200	3	182	328	241	655	On request
3T413	1.560	800	±100	605-2.235	1.330	470	47	1.600	3	182	460	234	746	On request
3T413	2.500	500	±100	645-2.445	1.460	470	47	1.000	2	182	257	249	631	On request
3T413	2.500	500	±100	645-2.445	1.460	470	47	1.200	2	182	318	242	685	On request
3T413	1.560	800	±100	645-2.445	1.460	470	47	1.600	2	182	446	235	775	On request
3T413	2.500	500	±100	645-2.445	1.460	470	47	1.000	3	182	257	249	631	On request
3T413	2.500	500	±100	645-2.445	1.460	470	47	1.200	3	182	318	242	685	On request
3T413	1.560	800	±100	645-2.445	1.460	470	47	1.600	3	182	446	235	775	On request

4T413	3.000	500	±100	575-1.975	1.130	470	47	1.200	3	182	325	283	709	On request
4T413	2.140	700	±100	575-1.975	1.130	470	47	1.400	3	182	392	277	773	On request
4T413	1.880	800	±100	575-1.975	1.130	470	47	1.600	3	182	449	271	802	On request
4T413	3.000	500	±100	475-1.975	1.330	470	47	1.200	3	182	319	283	728	On request
4T413	2.140	700	±100	475-1.975	1.330	470	47	1.400	3	182	385	278	792	On request
4T413	1.880	800	±100	475-1.975	1.330	470	47	1.600	3	182	441	272	820	On request
4T413	3.000	500	±100	605-2.235	1.330	470	47	1.200	3	182	318	283	731	On request
4T413	2.140	700	±100	605-2.235	1.330	470	47	1.400	3	182	384	278	795	On request
4T413	1.880	800	±100	605-2.235	1.330	470	47	1.600	3	182	440	272	822	On request
4T413	3.000	500	±100	635-2.435	1.460	470	47	1.200	3	182	311	285	756	On request
4T413	2.140	700	±100	635-2.435	1.460	470	47	1.400	3	182	375	279	820	On request
4T413	1.880	800	±100	635-2.435	1.460	470	47	1.600	3	182	430	273	847	On request

4,5T413	3.200	600	±100	595-1.995	1.200	470	52	1.200	3	223	325	242	829	On request
4,5T413	2.740	700	±100	595-1.995	1.200	470	52	1.400	3	223	389	237	890	On request
4,5T413	2.400	800	±100	595-1.995	1.200	470	52	1.600	3	223	444	236	946	On request
4,5T413	3.200	600	±100	465-1.865	1.330	470	52	1.200	3	223	321	241	841	On request
4,5T413	2.740	700	±100	465-1.865	1.330	470	52	1.400	3	223	385	236	902	On request
4,5T413	2.400	800	±100	465-1.865	1.330	470	52	1.600	3	223	440	235	958	On request
4,5T413	3.200	600	±100	695-2.325	1.330	470	52	1.200	3	223	313	242	878	On request
4,5T413	2.740	700	±100	695-2.325	1.330	470	52	1.400	3	223	375	237	940	On request
4,5T413	2.400	800	±100	695-2.325	1.330	470	52	1.600	3	223	428	236	995	On request
4,5T413	3.200	600	±100	565-2.195	1.460	470	52	1.200	3	223	316	241	861	On request
4,5T413	2.740	700	±100	565-2.195	1.460	470	52	1.400	3	223	379	236	922	On request
4,5T413	2.400	800	±100	565-2.195	1.460	470	52	1.600	3	223	433	235	978	On request
4,5T413	3.200	600	±100	765-2.595	1.460	470	52	1.200	3	223	309	242	897	On request

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
4,5T413	2.740	700	±100	765-2.595	1.460	470	52	1.400	3	223	370	237	958	On request
4,5T413	2.400	800	±100	765-2.595	1.460	470	52	1.600	3	223	422	236	1.014	On request

4,8T413	2.630	800	±100	695-2.325	1.330	470	52	1.600	3	213	424	276	1.013	On request
4,8T413	2.330	900	±100	695-2.325	1.330	470	52	1.800	3	213	493	274	1.092	On request
4,8T413	2.630	800	±100	565-2.195	1.460	470	52	1.600	3	213	428	276	996	On request
4,8T413	2.330	900	±100	565-2.195	1.460	470	52	1.800	3	213	499	273	1.075	On request

5T413	3.300	700	±160	545-2.175	1.550	470	52	1.400	4	213	349	296	1.046	On request
5T413	2.900	800	±160	545-2.175	1.550	470	52	1.600	4	213	402	293	1.115	On request
5T413	3.300	700	±160	545-2.445	1.820	470	52	1.400	4	213	341	297	1.081	On request
5T413	2.900	800	±160	545-2.445	1.820	470	52	1.600	4	213	392	294	1.150	On request

Bale clamps with higher capacities available upon request.



Variations in width, opening ranges and arm dimensions available upon request.

Also available without sideshift, model T403

Also available with 1 arm oscillating, model T413B-1.

Special version for Big Bags, based on the KAUP Bale Clamp, are also available.

Load Backrest see model T179.

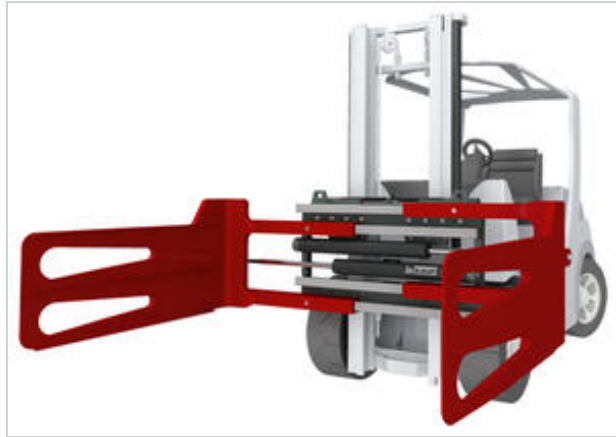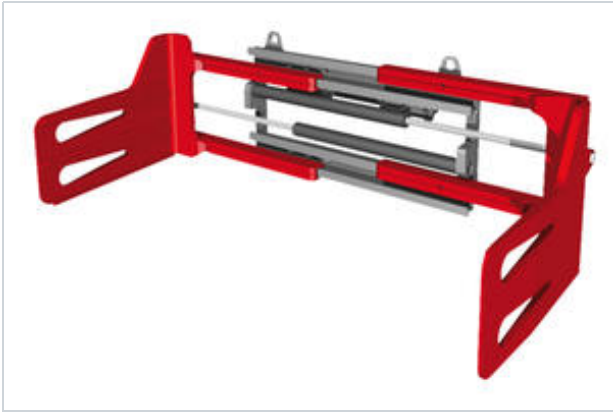

Specification:

KAUP attachments of the class T413

designed with high visibility are mainly used for in-plant, non-palletised transportation of bales of paper, waste paper, tobacco and textiles or also boxes and containers. Pulp, foamed plastic (polystyrene) wool and Big-Bags can also be transported with specially designed clamping arms.

Qualities:

- Excellent price-performance ratio
- Very good visibility
- Solid strengthened design with KAUP clamp profiles from T-profiles and C- profiles
- Solid slim arm design
- Independent sideshift serially
- Combination with KAUP rotary devices possible
- Customer specified modifications feasible