


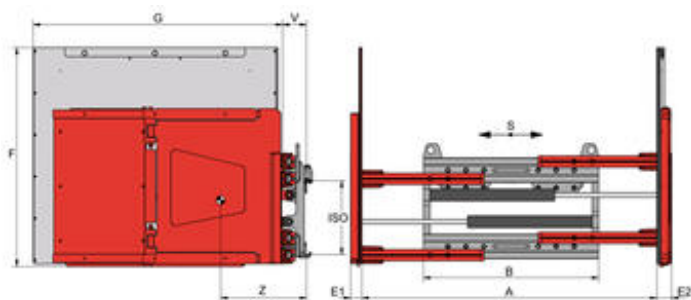

with independent sideshift - rubber coated arms - one arm fix, one arm swivelling - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	S mm	A mm	B mm	E1 mm	E2 mm	F mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.000	1.000	2	133	340	423	On request
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.000	1.200	2	133	396	463	On request
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.200	1.200	2	133	467	527	On request
1,5T413G-1L	1.250	500	±100	475-1.655	970	63	55	1.200	1.380	2	133	487	575	On request
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.000	1.000	2	133	339	425	On request
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.000	1.200	2	133	395	465	On request
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.200	1.200	2	133	466	529	On request
1,5T413G-1L	1.250	500	±100	325-1.425	1.040	63	55	1.200	1.380	2	133	486	577	On request
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.000	1.000	2	133	339	425	On request
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.000	1.200	2	133	395	465	On request
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.200	1.200	2	133	466	529	On request
1,5T413G-1L	1.250	500	±100	405-1.585	1.040	63	55	1.200	1.380	2	133	486	577	On request
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.000	1.000	2	133	336	435	On request
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.000	1.200	2	133	392	475	On request
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.200	1.200	2	133	462	539	On request
1,5T413G-1L	1.250	500	±100	485-1.835	1.130	63	55	1.200	1.380	2	133	481	587	On request
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.000	1.000	2	133	335	444	On request
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.000	1.200	2	133	390	484	On request
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.200	1.200	2	133	460	548	On request
1,5T413G-1L	1.250	500	±100	465-1.865	1.200	63	55	1.200	1.380	2	133	479	596	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.000	2	143	332	493	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.200	2	143	392	538	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.200	2	143	423	602	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.380	2	143	476	659	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.000	3	143	332	493	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.000	1.200	3	143	392	538	On request
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.200	3	143	423	602	On request

Model	Cap. kg	LCD mm	S mm	A mm	B mm	E1 mm	E2 mm	F mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
2T413G-1L	2.000	500	±100	520-1.720	970	63	60	1.200	1.380	3	143	476	659	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.000	2	143	330	498	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.200	2	143	390	543	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.200	2	143	421	607	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.380	2	143	474	664	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.000	3	143	330	498	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.000	1.200	3	143	390	543	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.200	3	143	421	607	On request
2T413G-1L	2.000	500	±100	550-1.850	1.040	63	60	1.200	1.380	3	143	474	664	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.000	2	143	328	503	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.200	2	143	387	548	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.200	2	143	418	612	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.380	2	143	471	669	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.000	3	143	328	503	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.000	1.200	3	143	387	548	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.200	3	143	418	612	On request
2T413G-1L	2.000	500	±100	460-1.760	1.130	63	60	1.200	1.380	3	143	471	669	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.000	2	143	314	527	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.200	2	143	373	572	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.200	2	143	404	636	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.380	2	143	457	693	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.000	3	143	314	527	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.000	1.200	3	143	373	572	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.200	3	143	404	636	On request
2T413G-1L	2.000	500	±100	460-1.960	1.330	63	60	1.200	1.380	3	143	457	693	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.000	2	143	307	551	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.200	2	143	366	596	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.200	2	143	397	660	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.380	2	143	450	717	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.000	3	143	307	551	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.000	1.200	3	143	366	596	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.200	3	143	397	660	On request
2T413G-1L	2.000	500	±100	570-2.370	1.520	63	60	1.200	1.380	3	143	450	717	On request

Add-on price for 100mm armlength / -height on request,

Possible with automatic pressure selection (upon request)

For contact pad coatings see accessories in the pricelist.

Also available with 2 contact pads on the swivelling arm - model T413G-2L / T403G-2L.

Also available without sideshift, model T403G-1L

Load Backrest see model T179.



Carton Clamp T413G-1L

Specification:

The KAUP Carton Clamp T413G-1L is used

where white and brown product as well as other wide loading property is

used. On account of his very slender arms this attachment is suited

particularly for the truck and container loading.

Qualities:

- Low lost load - very good residual capacities
- Very good visibility conditions
- Very slender clamp arms
- Independent sideshift serially
- Load backrest optionally