

with independent sideshift - rubber coated arms - both arms fix - 2 hydraulic functions

## Technical Data


Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
<b>1T413G</b>	<b>700</b>	<b>500</b>	<b>±100</b>	<b>500-1.680</b>	<b>970</b>	<b>700</b>	<b>23</b>	<b>690</b>	<b>2</b>	<b>153</b>	<b>207</b>	<b>275</b>	<b>On request</b>
1T413G	700	500	±100	500-1.680	970	1.000	23	690	2	153	248	332	On request
1T413G	700	500	±100	500-1.680	970	1.200	23	690	2	153	250	353	On request
1T413G	700	500	±100	350-1.450	1.040	700	23	690	2	153	206	270	On request
1T413G	700	500	±100	350-1.450	1.040	1.000	23	690	2	153	249	323	On request
1T413G	700	500	±100	350-1.450	1.040	1.200	23	690	2	153	253	342	On request
1T413G	700	500	±100	550-1.850	1.040	700	23	690	2	153	203	280	On request
1T413G	700	500	±100	550-1.850	1.040	1.000	23	690	2	153	245	337	On request
1T413G	700	500	±100	550-1.850	1.040	1.200	23	690	2	153	247	359	On request
<b>1T413G</b>	<b>700</b>	<b>500</b>	<b>±100</b>	<b>460-1.760</b>	<b>1.130</b>	<b>700</b>	<b>23</b>	<b>690</b>	<b>2</b>	<b>153</b>	<b>201</b>	<b>285</b>	<b>On request</b>
1T413G	700	500	±100	460-1.760	1.130	1.000	23	690	2	153	242	342	On request
1T413G	700	500	±100	460-1.760	1.130	1.200	23	690	2	153	245	364	On request
<b>1T413G</b>	<b>700</b>	<b>500</b>	<b>±100</b>	<b>490-1.890</b>	<b>1.200</b>	<b>700</b>	<b>23</b>	<b>690</b>	<b>2</b>	<b>153</b>	<b>199</b>	<b>290</b>	<b>On request</b>
1T413G	700	500	±100	490-1.890	1.200	1.000	23	690	2	153	240	347	On request
1T413G	700	500	±100	490-1.890	1.200	1.200	23	690	2	153	243	368	On request

1,5T413G	1.250	500	±100	515-1.695	970	700	28	690	2	158	221	351	On request
1,5T413G	1.250	500	±100	515-1.695	970	1.000	23	690	2	153	220	362	On request
1,5T413G	1.250	500	±100	515-1.695	970	1.200	23	690	2	153	241	395	On request
1,5T413G	1.250	500	±100	475-1.655	970	1.000	63	1.000	2	133	365	440	On request
<b>1,5T413G</b>	<b>1.250</b>	<b>500</b>	<b>±100</b>	<b>475-1.655</b>	<b>970</b>	<b>1.000</b>	<b>63</b>	<b>1.200</b>	<b>2</b>	<b>133</b>	<b>421</b>	<b>453</b>	<b>On request</b>
<b>1,5T413G</b>	<b>1.250</b>	<b>500</b>	<b>±100</b>	<b>475-1.655</b>	<b>970</b>	<b>1.200</b>	<b>63</b>	<b>1.200</b>	<b>2</b>	<b>133</b>	<b>491</b>	<b>508</b>	<b>On request</b>
1,5T413G	1.250	500	±100	365-1.465	1.040	700	28	690	2	158	221	346	On request
1,5T413G	1.250	500	±100	365-1.465	1.040	1.000	23	690	2	153	221	353	On request
1,5T413G	1.250	500	±100	365-1.465	1.040	1.200	23	690	2	153	240	398	On request
1,5T413G	1.250	500	±100	325-1.425	1.040	1.000	63	1.000	2	133	364	442	On request
1,5T413G	1.250	500	±100	325-1.425	1.040	1.000	63	1.200	2	133	420	455	On request
1,5T413G	1.250	500	±100	325-1.425	1.040	1.200	63	1.200	2	133	491	510	On request
<b>1,5T413G</b>	<b>1.250</b>	<b>500</b>	<b>±100</b>	<b>445-1.625</b>	<b>1.040</b>	<b>700</b>	<b>28</b>	<b>690</b>	<b>2</b>	<b>158</b>	<b>221</b>	<b>347</b>	<b>On request</b>
1,5T413G	1.250	500	±100	445-1.625	1.040	1.000	23	690	2	153	221	354	On request
1,5T413G	1.250	500	±100	445-1.625	1.040	1.200	23	690	2	153	243	384	On request
1,5T413G	1.250	500	±100	405-1.585	1.040	1.000	63	1.000	2	133	364	442	On request

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
1,5T413G	1.250	500	±100	405-1.585	1.040	1.000	63	1.200	2	133	420	455	On request
1,5T413G	1.250	500	±100	405-1.585	1.040	1.200	63	1.200	2	133	491	510	On request
1,5T413G	1.250	500	±100	475-1.775	1.130	700	28	690	2	158	216	361	On request
1,5T413G	1.250	500	±100	475-1.775	1.130	1.000	23	690	2	153	216	373	On request
1,5T413G	1.250	500	±100	475-1.775	1.130	1.200	23	690	2	153	237	406	On request
1,5T413G	1.250	500	±100	485-1.835	1.130	1.000	63	1.000	2	133	361	452	On request
1,5T413G	1.250	500	±100	485-1.835	1.130	1.000	63	1.200	2	133	417	465	On request
1,5T413G	1.250	500	±100	485-1.835	1.130	1.200	63	1.200	2	133	487	520	On request
1,5T413G	1.250	500	±100	505-1.905	1.200	700	28	690	2	158	214	367	On request
1,5T413G	1.250	500	±100	505-1.905	1.200	1.000	23	690	2	153	214	378	On request
1,5T413G	1.250	500	±100	505-1.905	1.200	1.200	23	690	2	153	235	411	On request
1,5T413G	1.250	500	±100	465-1.865	1.200	1.000	63	1.000	2	133	360	461	On request
1,5T413G	1.250	500	±100	465-1.865	1.200	1.000	63	1.200	2	133	415	474	On request
1,5T413G	1.250	500	±100	465-1.865	1.200	1.200	63	1.200	2	133	485	529	On request

2T413G	2.000	500	±100	550-1.850	1.040	1.000	63	1.000	2	143	355	520	On request
2T413G	2.000	500	±100	550-1.850	1.040	1.000	63	1.200	2	143	411	538	On request
2T413G	2.000	500	±100	550-1.850	1.040	1.200	63	1.200	2	143	481	593	On request
2T413G	2.000	500	±100	550-1.850	1.040	1.000	63	1.000	3	143	355	520	On request
2T413G	2.000	500	±100	550-1.850	1.040	1.000	63	1.200	3	143	411	538	On request
2T413G	2.000	500	±100	550-1.850	1.040	1.200	63	1.200	3	143	481	593	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.000	63	1.000	2	143	353	525	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.000	63	1.200	2	143	409	543	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.200	63	1.200	2	143	478	598	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.000	63	1.000	3	143	353	525	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.000	63	1.200	3	143	409	543	On request
2T413G	2.000	500	±100	460-1.760	1.130	1.200	63	1.200	3	143	478	598	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.000	63	1.000	2	143	339	549	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.000	63	1.200	2	143	395	567	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.200	63	1.200	2	143	464	622	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.000	63	1.000	3	143	339	549	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.000	63	1.200	3	143	395	567	On request
2T413G	2.000	500	±100	460-1.960	1.330	1.200	63	1.200	3	143	464	622	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.000	63	1.000	2	143	332	573	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.000	63	1.200	2	143	388	591	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.200	63	1.200	2	143	457	646	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.000	63	1.000	3	143	332	573	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.000	63	1.200	3	143	388	591	On request
2T413G	2.000	500	±100	570-2.370	1.520	1.200	63	1.200	3	143	457	646	On request

Add-on price for 100mm armlength / -height on request,  
Possible with automatic pressure selection (upon request)  
For contact pad coatings see accessories in the pricelist.  
Also available without sideshift, model T403G/GL  
Load Backrest see model T179.

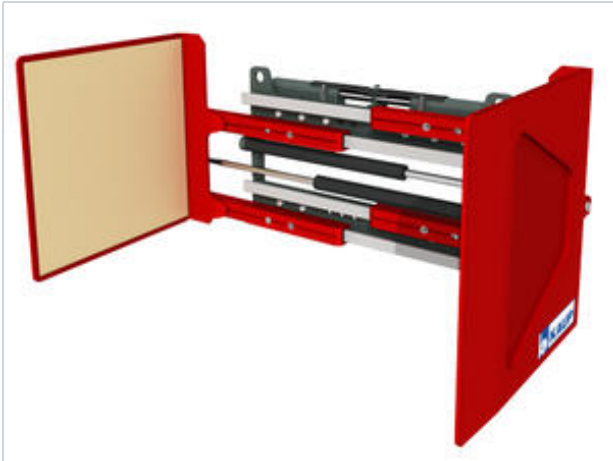

### Specification:

The KAUP Appliance Clamp T413G is used for the transport of white and brown product as well as other wide loading property. Equipped with very slender arms this attachment is suited particularly for the truck and container loading.

### Qualities:

- Low lost load - very good residual capacities
- Very good visibility conditions
- Very slender clamp arms
- Independent sideshift serially
- Load backrest optionally