
Telescopic Appliance Clamp T413GT (22.11.2026)

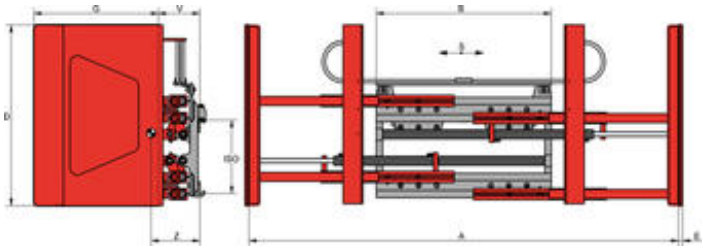


with independent sideshift - rubber coated arms - both arms fix - 2 hydraulic functions

Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
1T413GT	700	500	±100	380-2.380	970	1.000	28	690	2	232	270	435	On request
1,5T413GT	1.250	500	±100	440-2.440	970	1.000	28	690	2	242	285	470	On request
1,5T413GT	1.250	500	±100	410-2.610	1.200	1.000	28	690	2	242	285	486	On request
1,5T413GT	1.250	500	±100	440-2.440	970	1.200	28	690	2	242	300	515	On request
1,5T413GT	1.250	500	±100	410-2.610	1.200	1.200	28	690	2	242	295	530	On request
2T413GT	1.250	700	±100	475-2.475	1.130	1.050	78	1.380	2	281	438	830	On request
2T413GT	1.250	700	±100	450-2.750	1.330	1.050	78	1.380	2	281	429	871	On request
3T413GT	1.800	700	±100	475-2.475	1.130	1.050	78	1.380	3	281	424	854	On request
3T413GT	1.800	700	±100	450-2.750	1.330	1.050	78	1.380	3	281	416	895	On request

Add-on price for 100mm armlength / -height on request,
Possible with automatic pressure selection (upon request)
For contact pad coatings see accessories in the pricelist.
Also available without sideshift, model T403GT
Load Backrest see model T179.

Telescopic Appliance Clamp T413GT

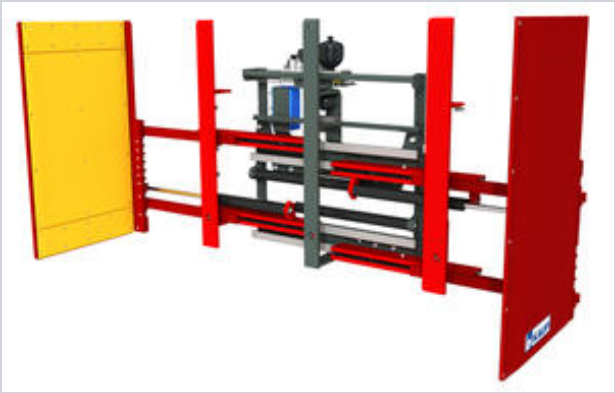

Specification:

The KAUP Telescopic Appliance

Clamp T413GT is used where white and brown product as well as other wide

loading property is used. The slender clamp arms predestine this

attachment for the truck and container loading.

Qualities:

- Very good visibility conditions
- Extremely big opening ranges with small construction width
- Independent sideshift serially
- Load backrest optionally