

with independent sideshift - 2 hydraulic functions

Technical Data


Model	Cap. kg	LCD mm	S mm	A mm	B mm	D mm	E mm	G mm	ISO	V mm	CofG Z mm	CofG _v Y mm	Weight kg	Price 人民币
1,5T413R	500	1.000	±100	760-2.260	1.130	500	50	1.500	2	133	266	263	348	On request
1,5T413R	500	1.000	±100	840-2.460	1.330	500	50	1.500	2	133	259	262	362	On request
1,5T413R	500	1.000	±100	840-2.460	1.330	500	50	1.800	2	133	304	262	372	On request

2T413R	800	1.000	±100	600-1.900	1.040	500	50	1.800	2	143	313	263	377	On request
2T413R	800	1.000	±100	600-2.450	1.600	500	50	1.800	2	143	279	263	438	On request

Variations in width, opening ranges and arm dimensions available upon request.

Also available without sideshift, model T403R

Load Backrest see model T179.

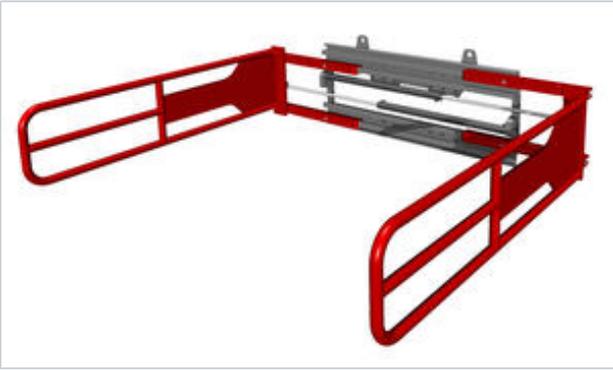

Specification:

The easiest way to transport

non-palletised bales of foam rubber or styrofoam is with clamps in the

T413R range designed with high visibility. The Foam Rubber Clamp has the

same high qualities of all KAUP clamps: variability, stability,

reliability.

Qualities:

- Excellent price-performance ratio
- Good visibility conditions
- Solid strengthened design with KAUP clamp profiles from T-profiles and C-profiles
- Strong tube design
- Independent sideshift serially
- Customer specified modifications feasible