
Recycling Bale Clamp T413RC (10.11.2026)

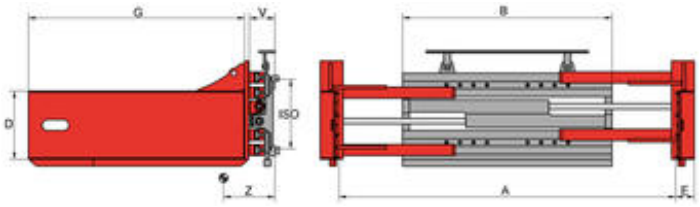


with valveblock sideshift dependent on opening range with cylinder- and sideshift protection - 2 hydraulic functions

Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	ISO	V mm	CofG Z mm	CofG$_V$ Y mm	Weight kg	Price 人民币
2T413RC	2.100	500	575-1.875	1.040	440	42	1.000	±325	2	136	277	216	566	On request
2T413RC	2.100	500	575-1.875	1.040	440	42	1.200	±325	2	136	344	218	620	On request
2T413RC	2.100	500	575-1.875	1.040	440	42	1.000	±325	3	136	277	216	566	On request
2T413RC	2.100	500	575-1.875	1.040	440	42	1.200	±325	3	136	344	218	620	On request
2T413RC	2.100	500	485-1.785	1.130	440	42	1.000	±325	2	136	274	215	573	On request
2T413RC	2.100	500	485-1.785	1.130	440	42	1.200	±325	2	136	340	217	628	On request
2T413RC	2.100	500	485-1.785	1.130	440	42	1.000	±325	3	136	274	215	573	On request
2T413RC	2.100	500	485-1.785	1.130	440	42	1.200	±325	3	136	340	217	628	On request
2T413RC	2.100	500	595-2.395	1.520	440	42	1.000	±450	2	136	255	220	634	On request
2T413RC	2.100	500	595-2.395	1.520	440	42	1.200	±450	2	136	316	221	689	On request
2T413RC	2.100	500	595-2.395	1.520	440	42	1.000	±450	3	136	255	220	634	On request
2T413RC	2.100	500	595-2.395	1.520	440	42	1.200	±450	3	136	316	221	689	On request
3T413RC	1.790	700	465-1.765	1.130	500	130	1.400	±325	2	145	379	227	778	On request
3T413RC	1.560	800	465-1.765	1.130	500	130	1.600	±325	2	145	432	223	804	On request
3T413RC	1.790	700	465-1.765	1.130	500	130	1.400	±325	3	145	379	227	778	On request
3T413RC	1.560	800	465-1.765	1.130	500	130	1.600	±325	3	145	432	223	804	On request
3T413RC	1.790	700	605-2.235	1.330	500	130	1.400	±407,5	2	145	368	227	807	On request
3T413RC	1.560	800	605-2.235	1.330	500	130	1.600	±407,5	2	145	419	223	843	On request
3T413RC	1.790	700	605-2.235	1.330	500	130	1.400	±407,5	3	145	368	227	807	On request
3T413RC	1.560	800	605-2.235	1.330	500	130	1.600	±407,5	3	145	419	223	843	On request
4T413RC	2.140	700	565-1.965	1.130	500	130	1.400	±350	3	155	348	251	876	On request
4T413RC	1.880	800	565-1.965	1.130	500	130	1.600	±350	3	155	395	246	912	On request
4T413RC	2.140	700	595-2.225	1.330	500	130	1.400	±407,5	3	155	333	254	931	On request
4T413RC	1.880	800	595-2.225	1.330	500	130	1.600	±407,5	3	155	377	249	967	On request
4,5T413RC	2.400	800	550-1.950	1.200	500	130	1.600	±350	3	181	410	226	1.006	On request
4,5T413RC	1.920	1.000	550-1.950	1.200	500	130	2.000	±350	3	181	486	209	1.050	On request
4,5T413RC	2.400	800	650-2.280	1.330	500	130	1.600	±407,5	3	181	401	226	1.032	On request
4,5T413RC	1.920	1.000	650-2.280	1.330	500	130	2.000	±407,5	3	181	476	209	1.076	On request
4,5T413RC	2.400	800	590-2.290	1.460	500	130	1.600	±425	3	181	395	225	1.054	On request
4,5T413RC	1.920	1.000	590-2.290	1.460	500	130	2.000	±425	3	181	468	208	1.098	On request
4,5T413RC	2.400	800	630-2.460	1.550	500	130	1.600	±457,5	3	181	389	225	1.073	On request

Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	VSmax mm	ISO	V mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
4,5T413RC	1.920	1.000	630-2.460	1.550	500	130	2.000	±457,5	3	181	462	208	1.117	On request
4,8T413BRC	3.300	800	585-2.085	1.330	500	130	1.600	±375	3	211	398	299	1.298	On request
4,8T413BRC	2.200	1.000	585-2.085	1.330	500	130	2.000	±375	3	211	495	280	1.385	On request
5,5T413BRC	3.300	800	625-2.525	1.740	500	130	1.600	±475	4	211	375	290	1.412	On request
5,5T413BRC	2.200	1.000	625-2.525	1.740	500	130	2.000	±475	4	211	465	281	1.499	On request
6T413BRC	4.000	800	685-2.585	1.740	600	160	1.600	±475	4	211	383	291	1.433	On request
6T413BRC	3.300	1.000	685-2.585	1.740	600	160	2.000	±475	4	211	479	282	1.521	On request
6T413BRC	4.000	800	565-2.465	1.860	600	160	1.600	±475	4	211	378	292	1.455	On request
6T413BRC	3.300	1.000	565-2.465	1.860	600	160	2.000	±475	4	211	474	283	1.543	On request
6T413BRC	4.000	800	595-2.695	2.030	600	160	1.600	±525	4	211	371	293	1.493	On request
6T413BRC	3.300	1.000	595-2.695	2.030	600	160	2.000	±525	4	211	465	284	1.581	On request
6,5T413BRC	6.000	800	685-2.585	1.740	600	160	1.600	±475	4	221	374	293	1.509	On request
6,5T413BRC	4.000	1.000	685-2.585	1.740	600	160	2.000	±475	4	221	477	284	1.576	On request
6,5T413BRC	6.000	800	565-2.465	1.860	600	160	1.600	±475	4	221	370	293	1.531	On request
6,5T413BRC	4.000	1.000	565-2.465	1.860	600	160	2.000	±475	4	221	472	284	1.598	On request
6,5T413BRC	6.000	800	595-2.695	2.030	600	160	1.600	±525	4	221	363	295	1.572	On request
6,5T413BRC	4.000	1.000	595-2.695	2.030	600	160	2.000	±525	4	221	463	286	1.639	On request
8T413BRC	8.000	800	585-2.985	2.200	600	160	1.600	±600	4	258	339	348	2.294	On request
8T413BRC	6.500	1.000	585-2.985	2.200	600	160	2.000	±600	4	258	423	339	2.418	On request

Also available without sideshift, model T403RC/BRC
Load Backrest see model T179.

Recycling Bale Clamp T413RC

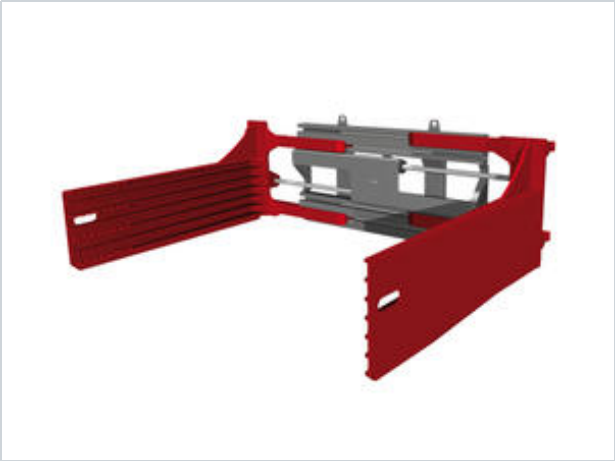

Specification:

KAUP Recycling Clamps are suitable for

the transportation of non- palletised reusable materials in the

recycling industry. This special range of bale clamps has several

specific features, e.g. clamping arms 2 metres long for clamping the

load, strengthened arm connections on the clamp profiles to allow

clamping with the tips of the arms.

Qualities:

- Excellent price-performance ratio
- Solid strengthened design with KAUP clamp profiles from T-profiles and C-profiles
- Strengthened arm construction with toothed bars
- Solid wear and tear bars under clamp body and clamp arms optionally
- Valveblock sideshift serially
- Combination with KAUP rotary devices possible
- Customer specified modifications feasible