
Triple Pallet Handler T429B1-2-3 (11.11.2026)

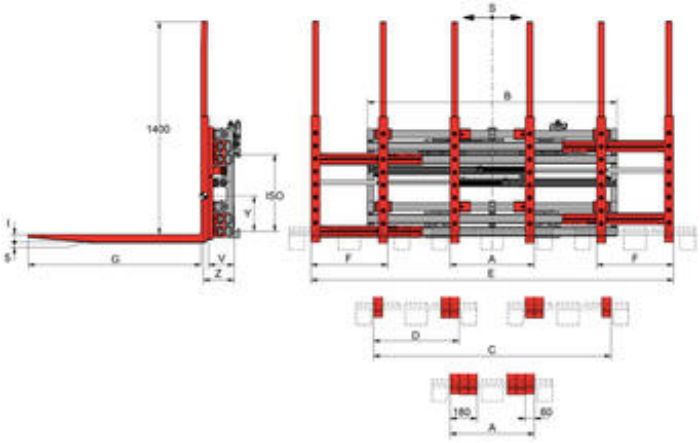

with independent sideshift - with bolt-on forks, for 1, 2 or 3 pallets side by side - 2 hydraulic functions[1)]

Model	Pallet handling	Cap. kg	LCD mm	For FLT max.	S mm	B mm	A mm	C mm	E mm	D mm	F mm	G mm	I mm	ISO	V mm	CofG Z mm	CofG$_v$ Y mm	Weight kg	Price 人民币
3T429B-1-2-3	**800x1200**	**3.000**	**600**	**3,5/500**	**±100**	**1.460**	**560**	**1.580**	**2.210**	**570**	**510**	**1.150**	**50**	**2**	**170**	**227**	**275**	**712**	**On request**
3T429B-1-2-3	**800x1200**	**3.000**	**600**	**3,5/500**	**±100**	**1.460**	**560**	**1.580**	**2.210**	**570**	**510**	**1.150**	**50**	**3**	**170**	**227**	**275**	**712**	**On request**
3T429B-1-2-3	**800x1200**	**3.000**	**600**	**3,5/500**	**±100**	**1.660**	**560**	**1.580**	**2.410**	**570**	**510**	**1.150**	**50**	**2**	**170**	**221**	**277**	**739**	**On request**
3T429B-1-2-3	**800x1200**	**3.000**	**600**	**3,5/500**	**±100**	**1.660**	**560**	**1.580**	**2.410**	**570**	**510**	**1.150**	**50**	**3**	**170**	**221**	**277**	**739**	**On request**
3T429B-1-2-3	800x1200	3.000	600	3,5/500	±100	1.760	560	1.580	2.510	570	510	1.150	50	2	170	219	278	752	On request
3T429B-1-2-3	800x1200	3.000	600	3,5/500	±100	1.760	560	1.580	2.510	570	510	1.150	50	3	170	219	278	752	On request
3T429B-1-2-3	1000x1200	3.000	600	3,5/500	±100	1.960	660	1.900	2.910	680	620	1.150	50	2	170	213	273	781	On request
3T429B-1-2-3	1000x1200	3.000	600	3,5/500	±100	1.960	660	1.900	2.910	680	620	1.150	50	3	170	213	273	781	On request
4T429B-1-2-3	**800x1200**	**3.800**	**600**	**5,0/500**	**±100**	**1.460**	**560**	**1.580**	**2.210**	**570**	**510**	**1.150**	**60**	**3**	**170**	**244**	**268**	**761**	**On request**
4T429B-1-2-3	**800x1200**	**3.800**	**600**	**5,0/500**	**±100**	**1.660**	**560**	**1.580**	**2.410**	**570**	**510**	**1.150**	**60**	**3**	**170**	**238**	**270**	**787**	**On request**
4T429B-1-2-3	800x1200	3.800	600	5,0/500	±100	1.760	560	1.580	2.510	570	510	1.150	60	3	170	236	271	800	On request
4T429B-1-2-3	1000x1200	3.800	600	5,0/500	±100	1.960	660	1.900	2.910	680	620	1.150	60	3	170	230	273	829	On request
4T429B-1-2-3	1200x1000	3.800	600	5,0/500	±100	2.150	670	1.910	3.120	680	620	1.000	60	3	170	193	283	851	On request
5T429B-1-2-3	800x1200	4.500	600	6,0/600	±160	1.460	560	1.580	2.210	570	510	1.150	60	4	190	243	321	861	On request
5T429B-1-2-3	800x1200	4.500	600	6,0/600	±160	1.660	560	1.580	2.410	570	510	1.150	60	4	190	238	323	890	On request
5T429B-1-2-3	1000x1200	4.500	600	6,0/600	±160	1.960	660	1.900	2.910	680	620	1.150	60	4	190	231	327	935	On request
5T429B-1-2-3	1200x1000	4.500	600	6,0/600	±160	2.150	670	1.910	3.120	680	620	1.000	60	4	190	199	341	954	On request

1) Solenoid valve for individual control of pallets left and right. (add-on-price)
Fork length optional 1200 mm, 1150 mm or 1000 mm.
Locating claw on fork tip available upon request. Wider fork shanks available upon request.

Triple Pallet Handler T429B1-2-3







Specification:

The simple construction of KAUP Triple

Pallet Handler T429B-1-2-3 with innovated visibility improved design ensures a clear view through and over the attachment to the fork tips and load. The practice orientated construction from T-profiles and C-profiles ensures highest stability and long operating hours with extended intervals between servicing and a minimum of required maintenance even in heavy duty operation. The excellent residual capacity compared to similar models increases the productivity of this Multi Pallet Handler even more.

Qualities:

- Triple Pallet Handlers for heavy duty tasks
- Very good visibility conditions
- Excellent residual capacity - best lost load centre in this class
- Synchronized for quicker working speeds
- Independent sideshift serially

- Screw-on forks serially
- Optional: independent control of seperate fork pairs - adjustment of opening range to suit different types of pallets