

Rotation 360° continuous - 2 hydraulic functions

Technical Data

Model	Cap. on forks kg	Cap. as clamp kg	LCD mm	A mm	B mm	D mm	E mm	G mm	H mm	I mm	K mm	Md Δ- P = 125 bar Nm	Req. oil volume per rotation ltr.	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
1,5T451	1.900	1.250	500	300-1.480	970	45	120	1.200	213	478	33	6.013	7,6	2	216	284	425	On request	On request
1,5T451	1.900	1.250	500	20-920	970	45	120	1.200	213	478	33	6.013	7,6	2	216	286	413	On request	On request
1,5T451	1.900	1.250	500	310-1.660	1.130	45	120	1.200	213	478	33	6.013	7,6	2	216	280	436	On request	On request
1,5T451	1.900	1.250	500	70-1.250	1.200	45	120	1.200	213	478	33	6.013	7,6	2	216	280	438	On request	On request
1,5T451	1.900	1.250	500	290-1.690	1.200	45	120	1.200	213	478	33	6.013	7,6	2	216	279	441	On request	On request

2T451	2.600	2.000	500	310-1.510	1.040	50	120	1.200	269	457	33	7.700	9,7	2	232	273	529	On request	On request
2T451	2.600	2.000	500	320-1.620	1.130	50	120	1.200	269	457	33	7.700	9,7	2	232	271	536	On request	On request
2T451	2.600	2.000	500	70-1.120	1.130	50	120	1.200	269	457	33	7.700	9,7	2	232	272	531	On request	On request
2T451	2.600	2.000	500	120-1.420	1.330	50	120	1.200	269	457	33	7.700	9,7	2	232	269	547	On request	On request
2T451	2.600	2.000	500	320-1.820	1.330	50	120	1.200	269	457	33	7.700	9,7	2	232	268	551	On request	On request
2T451	2.600	2.000	500	310-1.510	1.040	50	120	1.200	269	457	33	7.700	9,7	3	232	273	529	On request	On request
2T451	2.600	2.000	500	320-1.620	1.130	50	120	1.200	269	457	33	7.700	9,7	3	232	271	536	On request	On request
2T451	2.600	2.000	500	70-1.120	1.130	50	120	1.200	269	457	33	7.700	9,7	3	232	272	531	On request	On request
2T451	2.600	2.000	500	120-1.420	1.330	50	120	1.200	269	457	33	7.700	9,7	3	232	269	547	On request	On request
2T451	2.600	2.000	500	320-1.820	1.330	50	120	1.200	269	457	33	7.700	9,7	3	232	268	551	On request	On request

3T451	3.000	2.500	500	260-1.560	1.130	50	150	1.200	338	395	40	8.950	11,3	3	279	290	750	On request	On request
-------	-------	-------	-----	-----------	-------	----	-----	-------	-----	-----	----	-------	------	---	-----	-----	-----	------------	------------

Model	Cap. on forks kg	Cap. as clamp kg	LCD mm	A mm	B mm	D mm	E mm	G mm	H mm	I mm	K mm	Md Δ- P = 125 bar Nm	Req. oil volume per rotation ltr.	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
3T451	3.000	2.500	500	260- 1.760	1.330	50	150	1.200	338	395	40	8.950	11,3	3	279	288	770	On request	On request



4T451	3.600	2.900	500	260- 1.760	1.330	50	150	1.200	338	395	40	8.950	11,3	3	289	279	820	On request	On request
4T451	3.600	2.900	500	130- 1.630	1.460	50	150	1.200	338	395	40	8.950	11,3	3	289	278	830	On request	On request
4T451	3.600	2.900	500	260- 1.890	1.460	50	150	1.200	338	395	40	8.950	11,3	3	289	278	835	On request	On request

4,8T451	4.500	3.500	500	250- 1.650	1.330	60	150	1.200	338	395	40	8.950	11,3	3	314	294	990	On request	On request
4,8T451	4.500	3.500	500	120- 1.520	1.460	60	150	1.200	338	395	40	8.950	11,3	3	314	293	995	On request	On request
4,8T451	4.500	3.500	500	220- 1.720	1.460	60	150	1.200	338	395	40	8.950	11,3	3	314	293	1.000	On request	On request

5T451	4.500	3.500	600	270- 1.670	1.330	70	150	1.200	351	445	40	13.434	15,7	4	360	332	1.191	On request	On request
5T451	4.500	3.500	600	280- 1.910	1.550	70	150	1.200	351	445	40	13.434	15,7	4	360	329	1.237	On request	On request
5T451	4.500	3.500	600	550- 2.450 ¹⁾	1.550	70	150	1.200	351	445	40	13.434	15,7	4	360	328	1.301	On request	On request
5T451	4.500	3.500	600	280- 2.180	1.820	70	150	1.200	351	445	40	13.434	15,7	4	360	326	1.279	On request	On request

6T451B	6.000	4.200	600	490- 2.390 ¹⁾	1.550	60	180	1.200	351	510	40	17.157	20,7	4	392	318	1.700	On request	On request
---------------	-------	-------	-----	-----------------------------	-------	----	-----	-------	-----	-----	----	--------	------	---	-----	-----	-------	---------------	---------------

1) Transport of europallets lengthwise not possible.
Also available with sideshift, model T491 on request
with screw-on forks available upon request: T451A

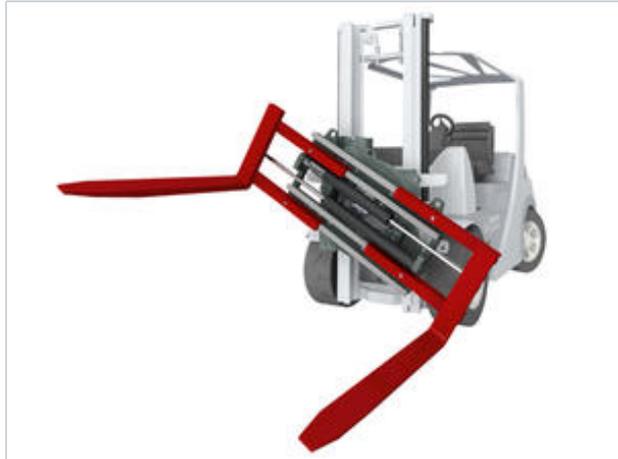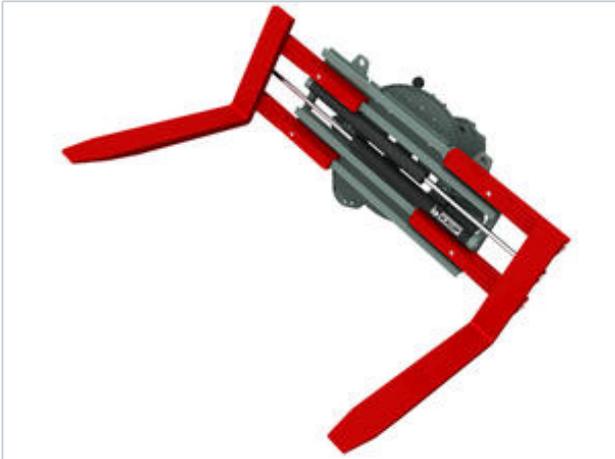

Specification:

The KAUP Rotating Fork Clamp T451 is an attachment designed with high visibility. Its solid, strengthened construction using 1000-fold proven basic components of the KAUP modular system gives numerous possibilities for heavy duty applications.

Qualities:

- Good visibility conditions
- Solid construction
- Rotation 360° endless
- Attachment also available with screw-on forks
- Opening range larger than the construction width
- Optionally available with sideshift