


Rotation 360° continuous - with two movable fork pairs - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	A mm	B mm	D mm	E mm	G mm	H mm	I mm	K mm	Md Δ-P = 125 bar Nm	Req. oil volume per rotation ltr.	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price per 100mm fork length 人民币
1,5T451W	1.250	500	540-1.720	970	45	125	1.200	213	432	33	6.013	7,6	2	216	383	531	On request	On request
1,5T451W	1.250	500	530-1.930	1.200	45	125	1.200	213	432	33	6.013	7,6	2	216	376	547	On request	On request
2T451W	2.000	500	560-1.860	1.130	50	150	1.200	269	515	33	7.700	9,7	2	232	385	725	On request	On request
2T451W	2.000	500	560-2.060	1.330	50	150	1.200	269	515	33	7.700	9,7	2	232	381	740	On request	On request
2T451W	2.000	500	560-1.860	1.130	50	150	1.200	269	515	33	7.700	9,7	3	232	385	725	On request	On request
2T451W	2.000	500	560-2.060	1.330	50	150	1.200	269	515	33	7.700	9,7	3	232	381	740	On request	On request
3T451W	2.500	500	560-1.860	1.130	50	150	1.200	338	395	40	8.950	11,3	3	279	373	869	On request	On request
3T451W	2.500	500	560-2.060	1.330	50	150	1.200	338	395	40	8.950	11,3	3	279	369	888	On request	On request
4T451W	2.900	500	560-2.060	1.330	60	160	1.200	338	395	40	8.950	11,3	3	289	380	1.029	On request	On request
4T451W	2.900	500	560-2.190	1.460	60	160	1.200	338	395	40	8.950	11,3	3	289	378	1.041	On request	On request
4,5T451W	2.900	500	560-2.060	1.330	60	160	1.200	328	675	36	14.823	17,4	4	291	364	1.155	On request	On request
4,5T451W	2.900	500	560-2.180	1.460	60	160	1.200	328	675	36	14.823	17,4	4	291	362	1.169	On request	On request
5T451W	3.500	600	580-2.210	1.550	60	200	1.200	345	455	40	13.434	15,7	4	360	412	1.442	On request	On request
5T451W	3.500	600	850-2.750	1.550	60	200	1.200	345	455	40	13.434	15,7	4	360	407	1.505	On request	On request

available with additional pair of forks - model T451W/180

Also available with sideshift, model T491W on request

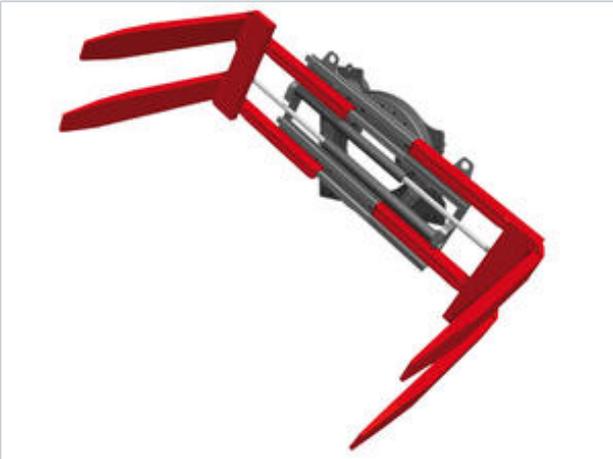

Specification:

The KAUP Pallet Turnover Clamp T451W is an attachment designed with high visibility and suitable for all kinds of applications. It can be used to turn palletised and non-palletised goods or to exchange pallets e.g. from production pallets to transport pallets. It is also suitable for emptying grid boxes or other transport containers.

Qualities:

- Good visibility conditions
- Solid construction
- Rotation 360° endless
- Two double forks serially for secure handling
- Optionally available with sideshift available
- Optionally with lateral supporting plate