

360° rotation continuous - with parallel guided arms - 2 hydraulic functions

Technical Data

Model	Cap. kg	LCD mm	Roll diameter mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	J mm	K mm	L mm	Md Δ- P = 125 bar Nm	Req. oil volume per rotation ltr.	ISO	V mm	CofG Z mm	Weight kg	Price 人民币	Add-on price f. c-pads w. rubber coating 人民币
1T458P	1.200	600	350- 1.200	1.315	200	855	510	380	740	850	213	700	560	33	6.013	7,6	2	215	259	407	On request	On request
1,5T458P	1.200	675	300- 1.350	1.425	200	925	580	450	810	970	213	700	560	33	6.013	7,6	2	215	272	421	On request	On request
2T458P	2.000	750	300- 1.500	1.570	200	1.005	670	540	890	1.130	269	700	790	33	7.700	9,7	2	232	279	543	On request	On request
2T458P	2.000	750	300- 1.500	1.570	200	1.005	670	540	890	1.130	269	700	790	33	7.700	9,7	3	232	279	543	On request	On request
3T458P	2.500	750	300- 1.500	1.600	200	995	655	540	890	1.130	338	990	1.010	40	8.950	11,3	3	279	335	885	On request	On request
4T458P	3.200	935	430- 1.870	1.985	200	1.290	865	750	1.155	1.330	328	800	870	36	8.950	11,3	3	292	346	1.128	On request	On request
10T258	8.200	1150	900- 2.300	2.700	300	1.485	1.010	-	-	1.800	328	1.050	1.120	-	23.000	32,8	-	360	350	3.500	On request	On request
15T258	11.000	1150	900- 2.300	2.700	400	1.485	1.010	-	-	2.230	328	1.500	1.120	-	23.000	32,8	-	450	500	8.200	On request	On request
20T258	15.000	1150	900- 2.300	2.700	400	1.485	1.010	-	-	2.230	328	1.500	1.350	-	34.500	46,2	-	520	600	9.500	On request	On request


Capacity related to max. roll diameter.

Long arm mechanically adjustable.

For contact pad coatings see accessories in the pricelist.

Available as non rotating clamp model T418.

Also available with sideshift, model T498P on request

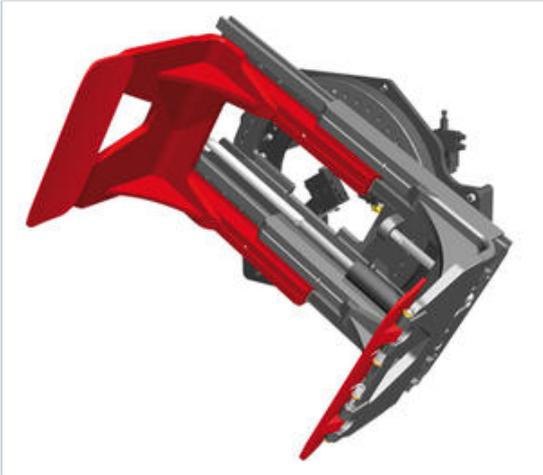

Specification:

The models of the class T458P/T258 of

KAUP own an essential differentiation sign compared with other rotating roll clamps: Independent of the used opening range the available clamp strength is always commensurate. This allows, that the carried product - no matter of which size - can always be taken up with the same strength carefully and can be transported certainly by parallel guided clamp arms.

Qualities:

- Robust construction
- Solid and very slender arm construction
- Rotation 360° endlessly