
# Sideshifter with increased sideshift stroke T151P-C (24.11.2026)

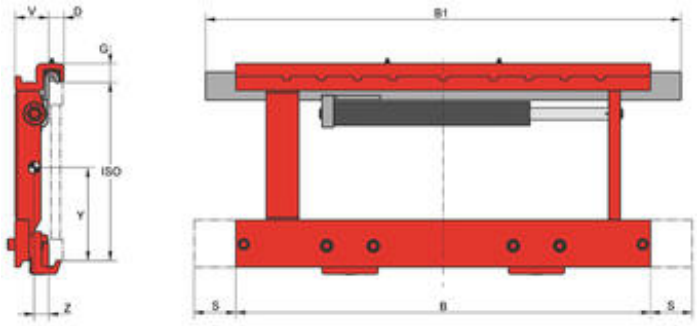


Sideshifter for container stuffing applications - 1 hydraulic function

| Model | Cap. kg | LCD mm | B mm | B1 mm | S mm[1)] | D mm | G mm | ISO | V mm | CofG Z mm | Weight kg | Price 人民币 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **2T151P4N-C** | **2.500** | **500** | **780** | **800** | **±160** | **33** | **33** | **2** | **55** | **21** | **55** | **On request** |
| **2T151P-C** | **2.500** | **500** | **780** | **1.020** | **±225** | **33** | **40** | **2** | **72** | **34** | **57** | **On request** |
| **2T151P-C** | 2.500 | 500 | 1.060 | 1.020 | ±225 | 33 | 40 | 2 | 72 | 35 | 68 | On request |
| **2T151P-C** | 2.500 | 500 | 1.150 | 1.020 | ±225 | 33 | 40 | 2 | 72 | 35 | 73 | On request |
| **4T151P-C** | 5.000 | 500 | 780 | 1.100 | ±250 | 40 | 49 | 3 | 82 | 36 | 90 | On request |
| **4T151P-C** | 5.000 | 500 | 1.200 | 1.100 | ±250 | 40 | 49 | 3 | 82 | 38 | 117 | On request |
| **4T151P-C** | 5.000 | 500 | 1.600 | 1.100 | ±250 | 40 | 49 | 3 | 82 | 40 | 143 | On request |
| **6T151P-C** | 8.000 | 600 | 1.800 | 1.100 | ±250 | 50 | 66 | 4 | 107 | 55 | 301 | On request |

1) Differing shift strokes available upon request.
Higher capacities and other construction widths available upon request.
Load Backrest see model T179.
2T151P4N-C with EASYSLIDE greasable sliding pads
Bottom brackets with roller guidance (SMOOTHROLL).
Optional in explosion proof version

# Sideshifter with increased sideshift stroke T151P-C






## Specification:

The KAUP Container Sideshifter T151P-C

simplifies loading and unloading of containers. This attachment with

increased sideshift stroke makes it possible to reach beyond the chassis

width of the forklift truck and place loads close to the container

wall.

## Qualities:

- Optimal utilisation for container loading
- Ideal for confined spaces