


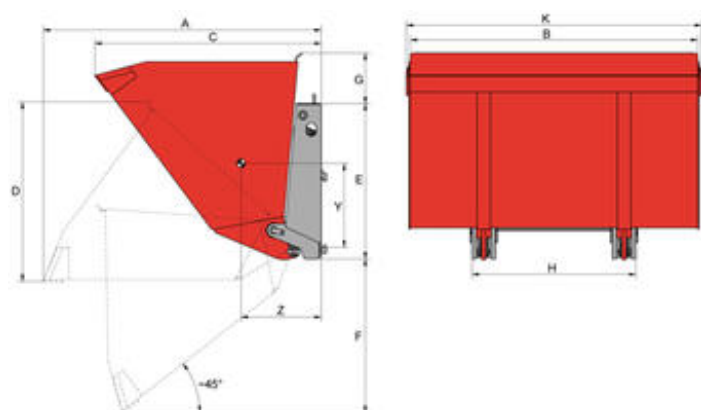

1 hydraulic function

Technical Data


Model	Cap. kg	Cubic capacity M ³	Contents fluid volumne M ³	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	ISO	LCD mm	CofG Z mm	CofG _v Y mm	Weight kg	Price 人民币
2T184.2	1.760	0,8	0,7	1.610	1.300	1.245	955	925	805	280	980	1.346	2	830	515	420	530	On request
2T184.2	1.760	0,8	0,7	1.610	1.300	1.245	955	925	805	280	980	1.346	3	830	515	420	530	On request
2T184.2	2.200	1,0	0,9	1.610	1.650	1.245	955	925	805	280	980	1.696	2	830	525	435	590	On request
2T184.2	2.200	1,0	0,9	1.610	1.650	1.245	955	925	805	280	980	1.696	3	830	525	435	590	On request
2T184.2	2.420	1,1	1,0	1.610	1.800	1.245	955	925	805	280	980	1.846	2	830	530	445	615	On request
2T184.2	2.420	1,1	1,0	1.610	1.800	1.245	955	925	805	280	980	1.846	3	830	530	445	615	On request

3T184.4	2.420	1,1	0,9	1.660	1.300	1.350	1.070	925	915	300	980	1.346	2	830	463	504	560	On request
3T184.4	2.420	1,1	0,9	1.660	1.300	1.350	1.070	925	915	300	980	1.346	3	830	463	504	560	On request
3T184.4	2.640	1,2	1,0	1.660	1.500	1.350	1.070	925	915	300	980	1.546	2	830	474	508	594	On request
3T184.4	2.640	1,2	1,0	1.660	1.500	1.350	1.070	925	915	300	980	1.546	3	830	474	508	594	On request
3T184.4	2.860	1,3	1,1	1.660	1.650	1.350	1.070	925	915	300	980	1.696	2	830	481	511	620	On request
3T184.4	2.860	1,3	1,1	1.660	1.650	1.350	1.070	925	915	300	980	1.696	3	830	481	511	620	On request
3T184.4	3.080	1,4	1,2	1.660	1.800	1.350	1.070	925	915	300	980	1.846	2	830	487	514	646	On request
3T184.4	3.080	1,4	1,2	1.660	1.800	1.350	1.070	925	915	300	980	1.846	3	830	487	514	646	On request

4T184.1	5.000	2,0	1,4	1.780	2.000	1.410	1.135	1.230	810	210	1.004	2.046	3	890	548	561	835	On request
---------	-------	-----	-----	-------	-------	-------	-------	-------	-----	-----	-------	-------	---	-----	-----	-----	-----	------------

Model	Cap. kg	Cubic capacity M	Contents fluid volumne M	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	K mm	ISO	LCD mm	CofG Z mm	CofG Y mm	Weight kg	Price 人民币
4T184.1	5.000	2,0	1,4	1.780	2.000	1.410	1.135	1.230	810	210	1.004	2.046	4	890	548	561	835	On request
6T184.4	6.600	3,0	2,4	2.250	2.400	1.990	1.370	1.265	1.190	245	1.143	2.484	4	1.125	700	595	1.620	On request
6T184.4	7.920	3,6	2,8	2.250	2.800	1.990	1.370	1.265	1.190	245	1.143	2.884	4	1.125	720	603	1.730	On request

2T,3T and 6T dimensioned for bulk weight up to 2.200 kg/m³. 4T dimensioned for bulk weight up to 2.500 kg/m³

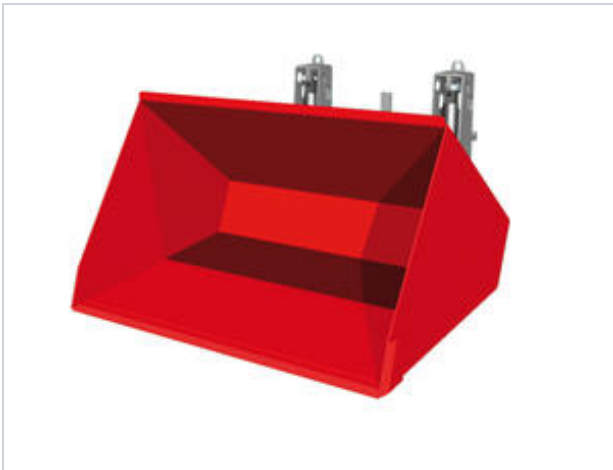

Specification:

The KAUP Loading Bucket T184 is the right choice for transporting loose goods such as sand, gravel, coal, grain, fertilizer, cement, concrete etc. and to overcome heights, e.g. for filling silos. The specific weight of loose goods can vary between 0,75 to/m³ (grain) and 3,5 to/m³ (scrap metal).

This attachment can even be put into use in winter to clear snow or to deposit it.

Qualities:

- For heavy duty operation
- Strong, strengthened construction